


LOC/DME I-SWO 109.15 Chan 28 (Y)	APP CRS 175°	Rwy Idg TDZE Apt Elev	7401 1000 1000
--	------------------------	-----------------------------	---

ILS or LOC RWY 17
STILLWATER RGNL (SWO)

ADF required. ⚠ VDP NA when using Ponca City altimeter setting. When local altimeter setting not received, use Ponca City altimeter setting and increase S-ILS 17 DA to 1280 feet; increase all MDAs 80 feet and S-LOC 17 visibility Cats C/D ½ SM, and increase Circling Cat C visibility ¼ SM and Cat D visibility ½ SM. For inop ALS when using Ponca City altimeter setting, increase S-ILS 17 all Cats visibility to ¾ SM.	MALSR AS	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct GABEH LOM and hold, continue climb-in-hold to 3200.
---	--------------------	---

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

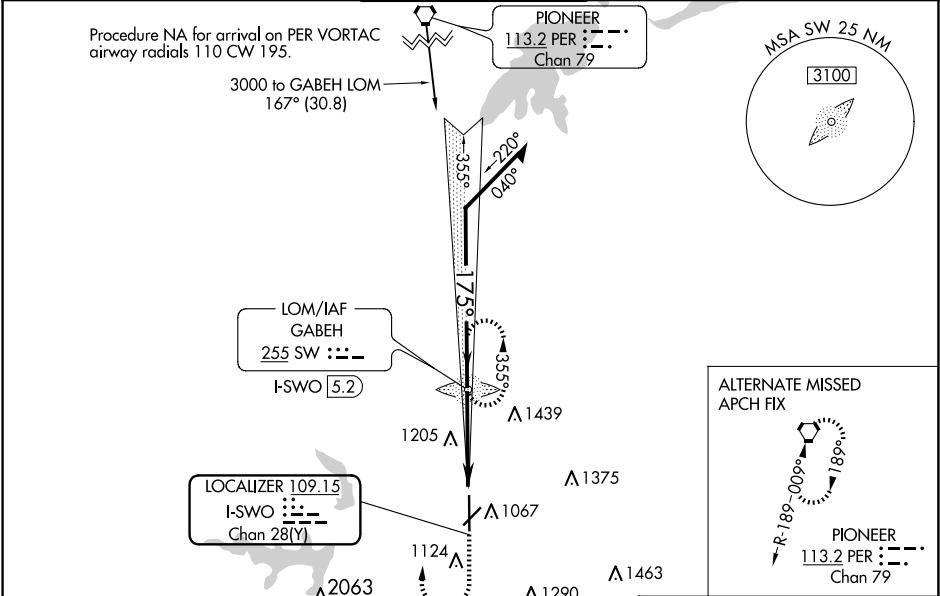

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).					1500	3200	SW
Remain within 10 NM					GABEH LOM I-SWO 5.2		
GS 3.00° TCH 42					2600	2260	2300
					355°	175°	
					I-SWO 2.7	I-SWO 1.4	
					2.5 NM	1.3	
CATEGORY	A	B	C	D			
S-ILS 17	1200-½		200 (200-½)				
S-LOC 17	1460-½	460 (500-½)	1460-⅞	460 (500-⅞)			
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-1½)	1740-2¼ 740 (800-2¼)			

ELEV 1000	D	TDZE 1000			
174°					
Z1					
AS					
7401 X 100					
5002 X 75					
0.5% UP					
0.5% UP					
35					
TWR 1018					
REIL Rwy 35					
MIRL Rwy 4-22 and 17-35					
FAF to MAP 3.8 NM					
Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16

SC-1, 17 APR 2025 to 15 MAY 2025

SC-1, 17 APR 2025 to 15 MAY 2025