

WAAS
CH **90108**
W17A

APP CRS
174°

Rwy Idg **7401**
TDZE **1000**
Apt Elev **1000**

RNAV (GPS) RWY 17

STILLWATER RGNL (SWO)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Ponca City altimeter setting. For inop ALS when using Ponca City altimeter setting, increase LPV visibility to ¾ SM, LNAV/VNAV visibility to 1 SM, and LNAV Cats C and D visibility to 1¾ SM. When local altimeter setting not received, use Ponca City altimeter setting: increase LPV DA to 1280 feet; increase LNAV/VNAV DA to 1359 feet and all visibilities ¾ SM; increase all MDA 80 feet and visibility LNAV Cats C and D ¼ SM and Circling Cat D ½ SM. For inop ALS, increase LNAV/VNAV visibility to ¾ SM.

MALSR

AS

⏏


⏏

⏏

MISSED APPROACH:

Climb to 3000 direct ESCOM and hold.

ASOS 135,725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122,95
------------------------	--	--	-------------------------	-------------------------

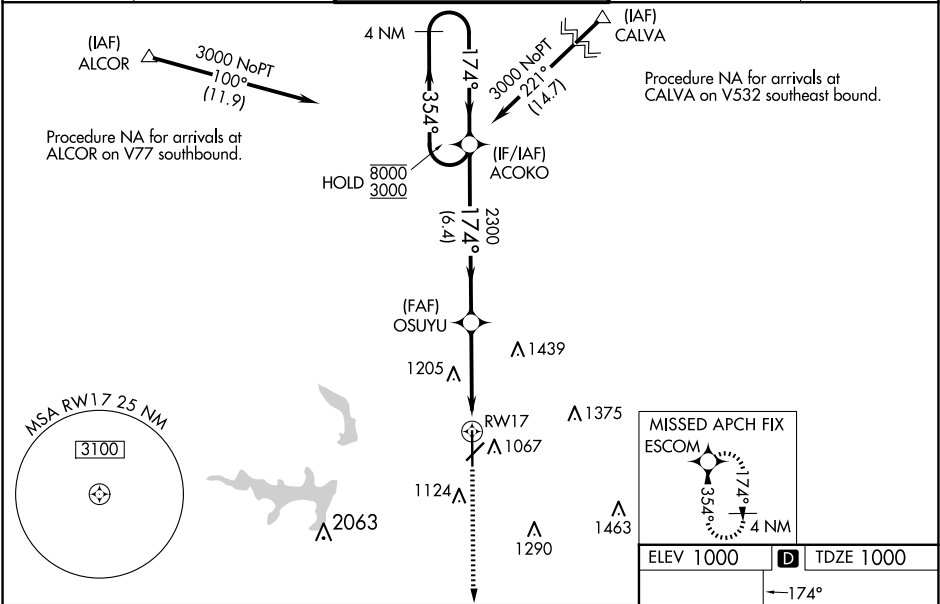

4 NM Holding Pattern

ACOKO

8000
3000

←354°
→174°

GP 3.00°
TCH 48

2300

OSUYU

2300

*1.2 NM to RWY17

RWY17

6.4 NM

2.7 NM

1.2 NM

3000

ESCOM

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		1200-½ 200 (200-½)		
LNAV/VNAV DA		1279-½ 279 (300-½)		
LNAV MDA	1440-½ 440 (500-½)		1440-¾ 440 (500-¾)	
CIRCLING	1440-1 440 (500-1)	1460-1 460 (500-1)	1520-1½ 520 (600-1½)	1740-2¼ 740 (800-2¼)

REIL Rwy 35 0

MIRL Rwy 4-22 and 17-35 0