

WAAS

CH 42633

W35A

APP CRS

354°

Rwy Idg

TDZE

Apt Elev

7401

966

1000

RNAV (GPS) RWY 35


STILLWATER RGNL (SWO)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Ponca City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Ponca City altimeter setting: increase LPV DA to 1246 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1336 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cats C/D ¼, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 3000 direct ACOKO and hold.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------	-----------------------------------	---------------------------------------	------------------	------------------

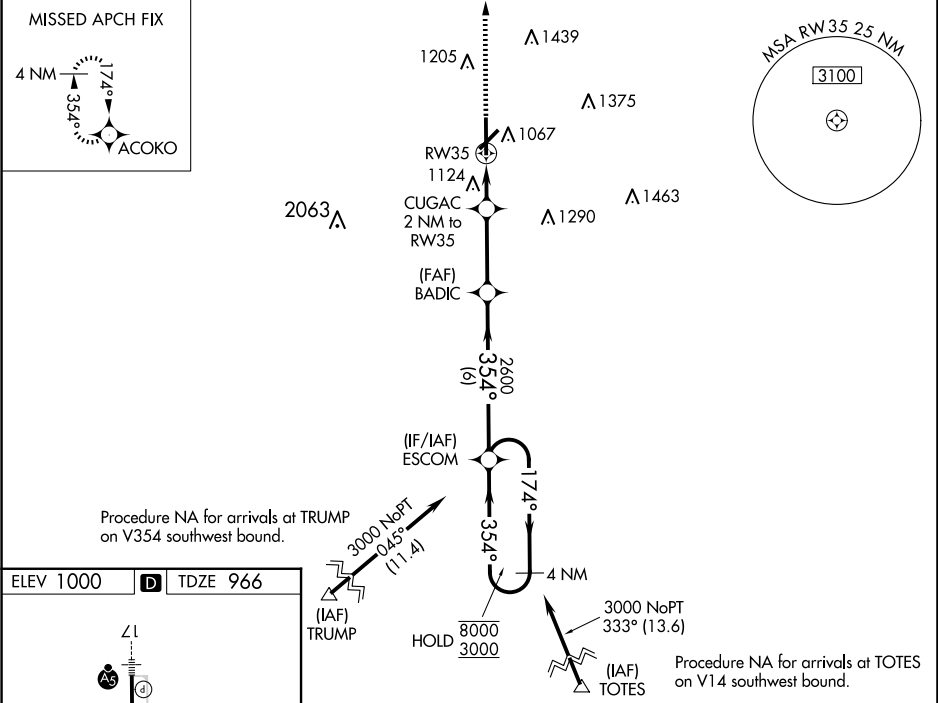

CATEGORY	A	B	C	D
LPV DA	1166-¾ 200 (200-¾)			
LNAV/VNAV DA	1256-1 290 (300-1)			
LNAV MDA	1380-1	414 (400-1)	1380-1½	414 (400-1½)
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-1½)	1740-2¼ 740 (800-2¼)

SC-1, 17 APR 2025 to 15 MAY 2025

SC-1, 17 APR 2025 to 15 MAY 2025