

WAAS
CH **56412**
W17A

APP CRS
174°

Rwy Idg
TDZE **845**
Apt Elev **846**

RNAV (GPS) RWY 17

MONROE COUNTY (BMG)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Terre Haute Rgnl altimeter setting and increase all DA 121 feet and all MDA 140 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C/D visibility ½ mile.

MISSED APPROACH: Climb to 3000 direct ALFRD and hold.

ASOS 134.525	HULMAN APP CON 128.025 339.8	BLOOMINGTON TOWER ★ 120.775 (CTAF) 0	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

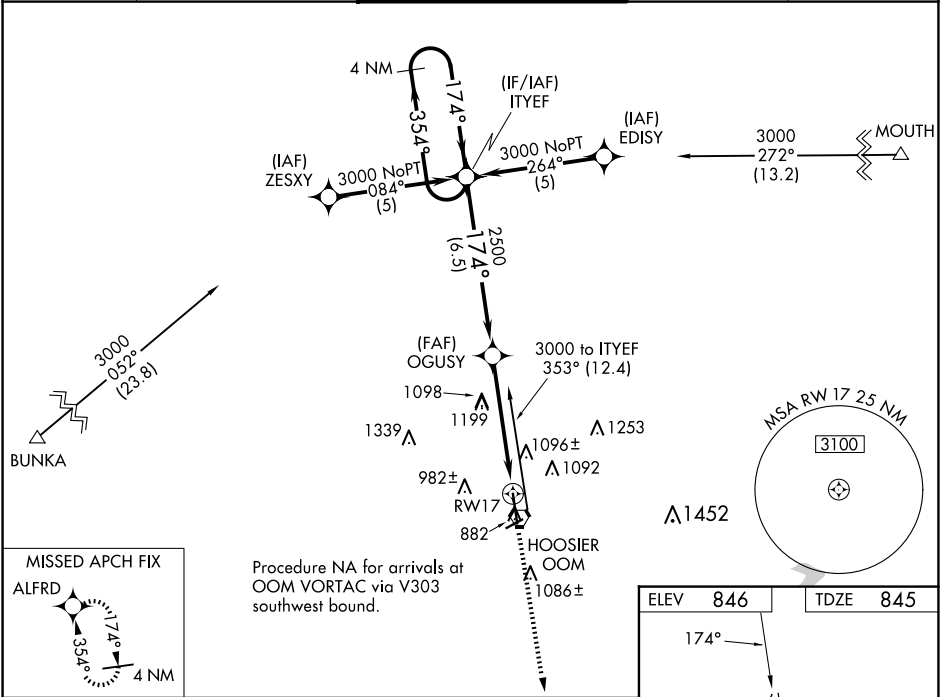

4 NM Holding Pattern

ITYEF

3000

354°

174°

GP 3.00° TCH 40

2500

6.5 NM

3.2 NM

1.8 NM

3000

ALFRD

*LNAV only

*1.8 NM to RW17

RW17

CATEGORY	A	B	C	D
LPV DA	1229-1¼ 384 (400-1¼)			
LNAV/VNAV DA	1404-2 559 (600-2)			
LNAV MDA	1460-1 614 (700-1)	1460-1¾ 614 (700-1¾)	1460-2 614 (700-2)	

ELEV **846**

TDZE **845**

174°

L1

4

6500 X 150

913

917

3798 X 100

35

MIRL Rwy 6-24 0

HIRL Rwy 17-35 0

REIL Rwy 17 0