


WAAS CH 93636 W13A	APP CRS 133°	Rwy Idg TDZE Apt Elev	7002 1391 1391
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13
BEMIDJI RGNL (BJI)

RNP APCH.		MALSR	MISSED APPROACH: Climb to 3200 direct OMIGY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM, increase LNAV Cats A and B visibility to 1 SM and Cats C and D visibility to 1½ SM.			

AWOS-3 119.275	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

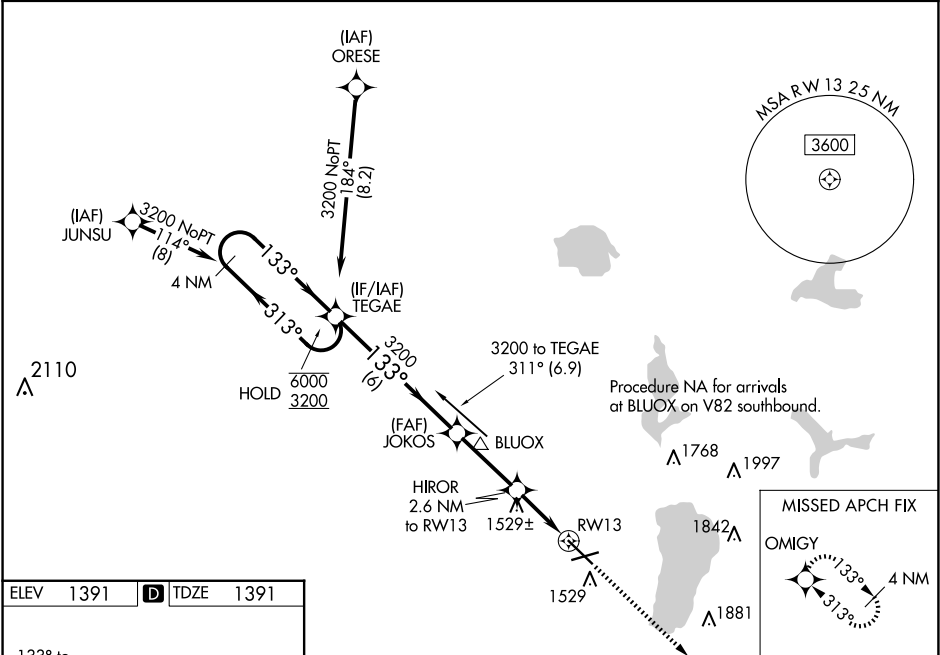

ELEV 1391	D	TDZE 1391
-----------	---	-----------

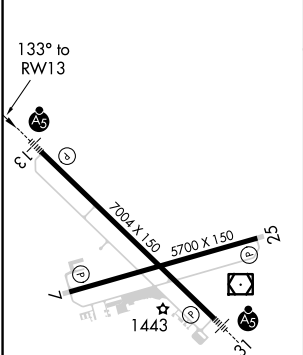

- HIRL Rwy 13-31
- MIRL Rwy 7-25
- REIL Rws 7 and 25

4 NM Holding Pattern		TEGAE	JOKOS	HIROR	OMIGY
6000 ← 313°		3200	3200	2.6 NM to RWY 13	
GP 3.00°		133°	3200	*1.1 NM to RWY 13	
TCH 45		133°	*2280		
		6 NM	2.9 NM	1.5 NM	1.1 NM
CATEGORY	A	B	C	D	
LPV DA		1648-¾	257 (300-¾)		
LNAV/VNAV DA		1680-¾	289 (300-¾)		
LNAV MDA		1780-¾	389 (400-¾)		
CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1½ 469 (500-1½)	1960-2 569 (600-2)	