

WAAS CH 82018 W05A	APP CRS 050°	Rwy Idg TDZE 1224 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 5


BRainerd Lakes RGNL (BRD)


⚠

Baro-VNAV NA when using AikIn altimeter setting. DME/DME RNP-0.3 NA. Procedure NA when R-4301 is active. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use AikIn altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cats C and D visibility ¼ mile. VDP NA with AikIn altimeter setting.

MISSED APPROACH: Climb to 3000 direct EYUPO and hold.

ASOS 126.775	MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

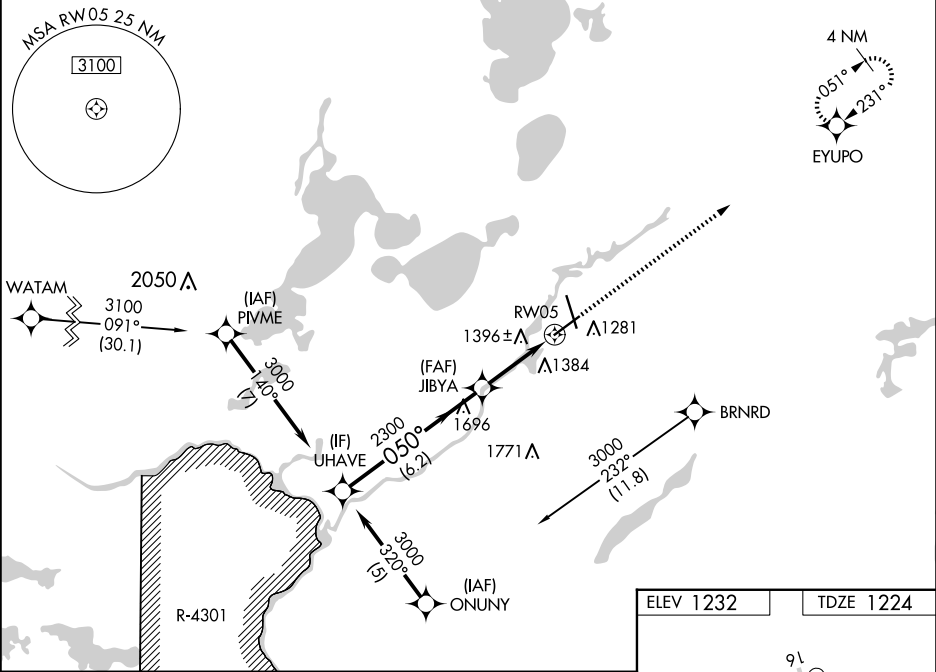

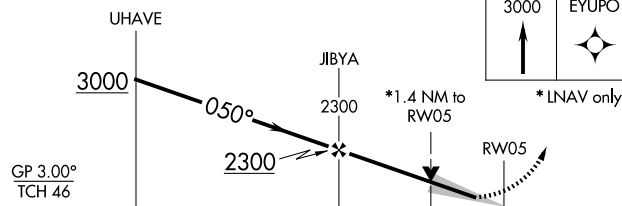					
GP 3.00° TCH 46					
CATEGORY	A	B	C	D	
LPV DA	1424-¾		200 (200-¾)		
LNAV/ VNAV DA	1777-2		553 (600-2)		
LNAV MDA	1700-1	476 (500-1)	1700-1¼ 476 (500-1¼)	1700-1½ 476 (500-1½)	
 CIRCLING	1760-1	528 (600-1)	1760-1½ 528 (600-1½)	1860-2 628 (700-2)	

