

WAAS  
CH **40113**  
**W08B**


APP CRS  
**087°**

Rwy Idg **10001**  
TDZE **794**  
Apt Elev **794**

RNAV (GPS) RWY 8R

GERALD R FORD INTL (G.R.R.)

|                                                                                                                                                                                                                              |                                             |                                                   |                         |                                                                                     |                         |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------|-------------------------|--|
| RNP APCH.<br><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.<br/>** RVR 1800 authorized with use of FD or AP or HUD to DA.</div> |                                             |                                                   | MALSR<br>               | MISSED APPROACH:<br>Climb to 2700 direct CAVUS and on track 085° to SARAN and hold. |                         |  |
| ATIS<br><b>118.725</b>                                                                                                                                                                                                       | GREAT LAKES APP CON ★<br><b>128.4 257.6</b> | GRAND RAPIDS TOWER★<br><b>135.65 (CTAF) 339.8</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>119.3</b>                                                            | UNICOM<br><b>122.95</b> |  |

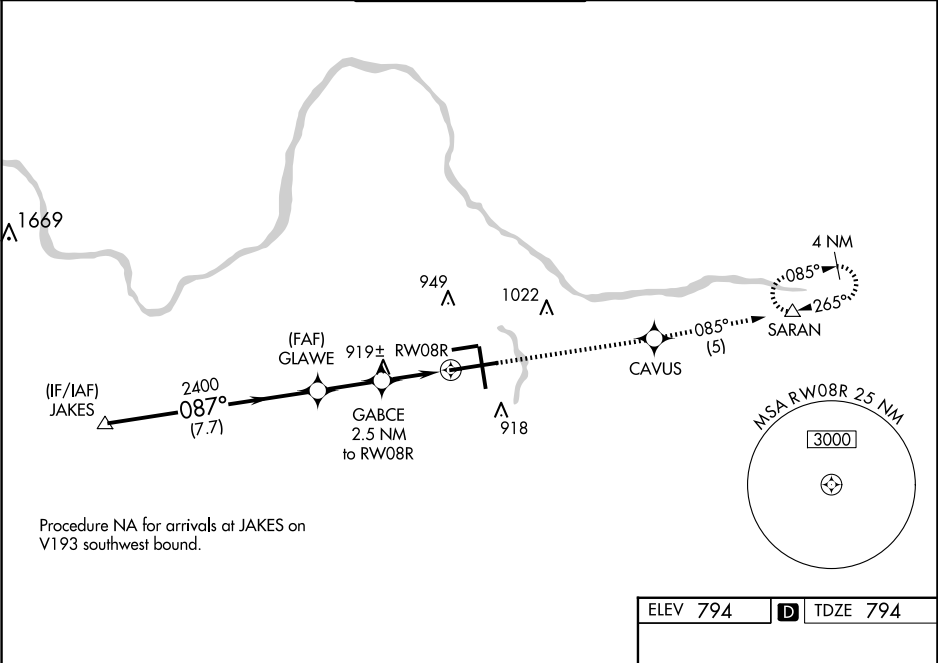

JAKES

2700

GP 3.00°  
TCH 51

GLAWE

2400

2700

CAVUS

tr 085°

SARAN

GABCE  
2.5 NM to RW08R

\*1.1 NM to RW08R

RW08R

\*1640

\*1.1 NM to RW08R

\*1.1 NM to RW08R

RW08R

7.7 NM

2.3 NM

1.4 NM

1.1 NM

994/24

200 (200-½)

1297/50

503 (600-1)

1180/24

386 (400-½)

1180/35

386 (400-¾)

1180/50

386 (400-1)

1260-1

466 (500-1)

1340-1½

546 (600-1½)

1360-2

566 (600-2)

ELEV 794

TDZE 794

TWR 948

5001 X 100

26R

10001 X 150

8501 X 150

26L

35

087°

MIRL Rwy 8L-26R

REIL Rwys 8L, 17 and 26R

HIRL Rwys 8R-26L and 17-35