
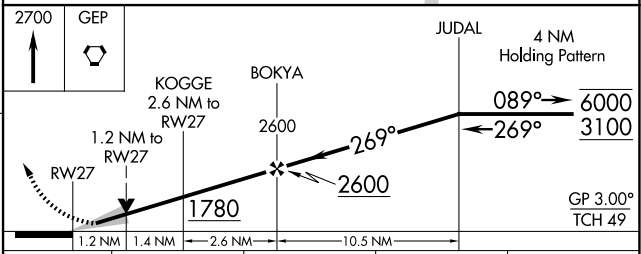
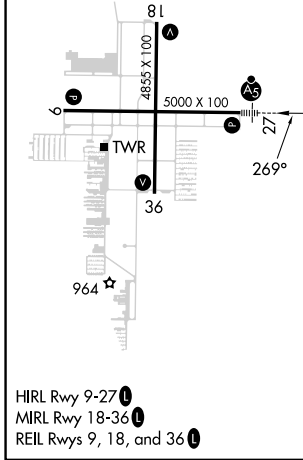


|                         |                        |                                                               |
|-------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>78300</b> | APP CRS<br><b>269°</b> | Rwy Idg <b>5000</b><br>TDZE <b>910</b><br>Apt Elev <b>912</b> |
|-------------------------|------------------------|---------------------------------------------------------------|

# RNAV (GPS) RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

|                        |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                          |                          |                                                |                                                                                                   |  |
|------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------|--|
| RNP APCH - GPS.        |                                            | <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1131 feet; increase LNAV/VNAV DA to 1361 feet and all visibilities 1/8 SM, increase all MDA 40 feet and visibility Cat C/D 1/4 SM, and Circling visibility Cat D 1/4 SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For inop ALS when using Crystal altimeter setting, increase LNAV Cat C/D visibility to 1 3/8 SM.</p> |                          | <p>MALSRL</p>            |                                                | <p>MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.</p> |  |
| ATIS<br><b>120.625</b> | MINNEAPOLIS APP CON<br><b>126.5 335.65</b> | ANOKA TOWER*<br><b>132.4</b> (CTAF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | GND CON<br><b>121.85</b> | CLNC DEL<br><b>121.3</b> | CLNC DEL<br><b>121.85</b><br>(When twr closed) | UNICOM<br><b>122.95</b>                                                                           |  |

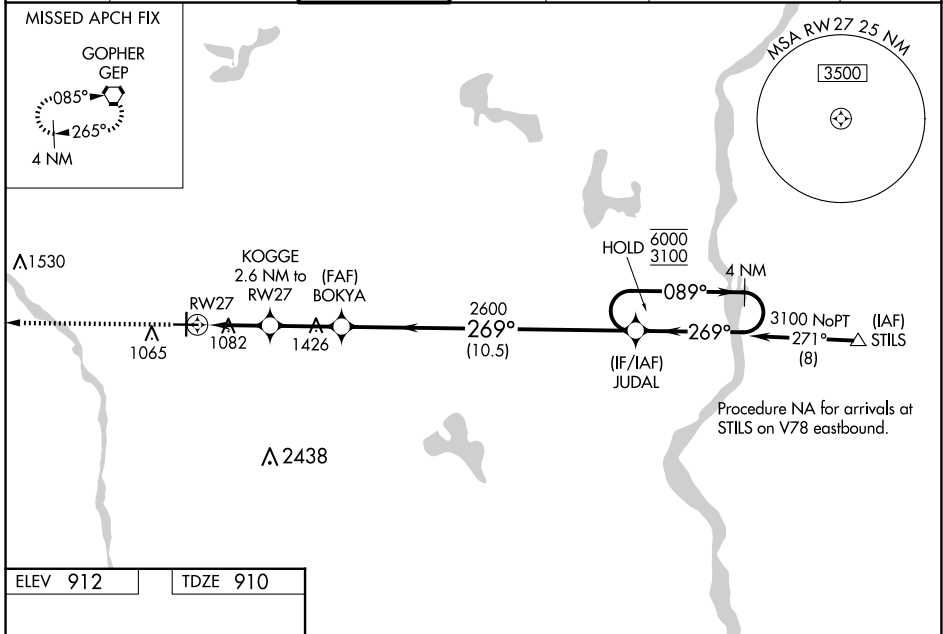

| CATEGORY     | A        | B             | C                             | D                     |
|--------------|----------|---------------|-------------------------------|-----------------------|
| LPV DA       |          | 1110-1/2      | 200 (200-1/2)                 |                       |
| LNAV/VNAV DA |          | 1340-3/4      | 430 (500-3/4)                 |                       |
| LNAV MDA     | 1340-1/2 | 430 (500-1/2) | 1340-3/4                      | 430 (500-3/4)         |
| CIRCLING     | 1400-1   | 488 (500-1)   | 1420-1 1/2<br>508 (600-1 1/2) | 1580-2<br>668 (700-2) |

NC-1, 17 APR 2025 to 15 MAY 2025

NC-1, 17 APR 2025 to 15 MAY 2025