

WAAS
CH **40316**
W22A

APP CRS
225°

Rwy Idg **3812**
TDZE **821**
Apt Elev **822**

RNAV (GPS) RWY 22
CLINTONVILLE MUNI (CLI)

RNP APCH.


T

A

Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA/MDA 80 feet. Increase LPV visibility ¾ SM all Cats and LNAV/VNAV visibility ¼ SM all Cats. Circling NA to Rwy 9 and 27. Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
HIDEV and hold.

AWOS-3 120.675	GREEN BAY APP CON ★ 126.3 338.2	UNICOM 122.8 (CTAF) 1
--------------------------	---	---------------------------------

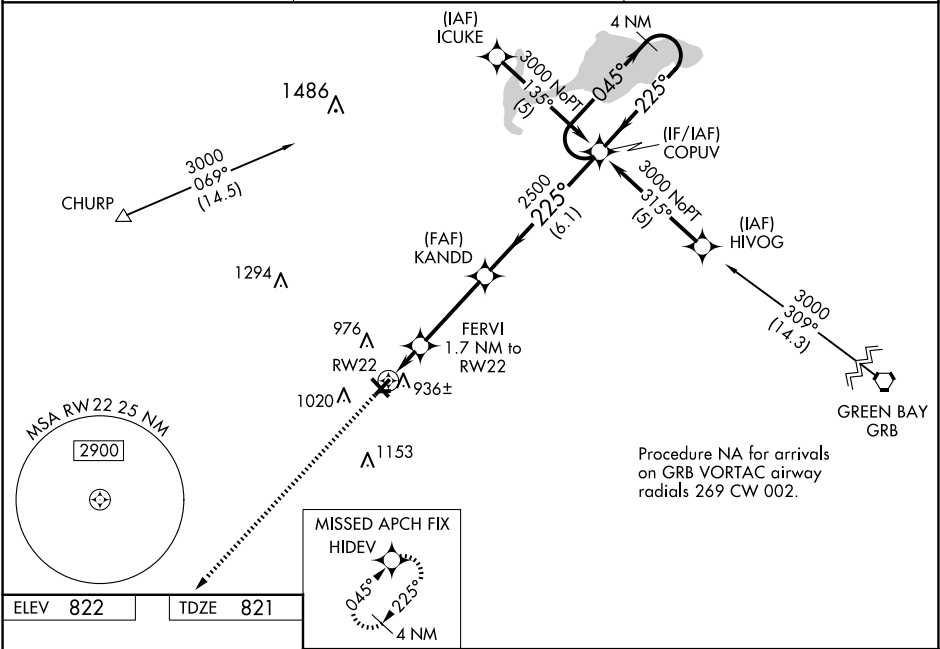

ELEV 822	TDZE 821
REIL Rwy 32 1 MIRL Rwy 4-22 and 14-32 1	