



LOC I-CKV 111.7	APP CRS 347°	Rwy Idg TDZE Apt Elev	5999 550 550
---------------------------	------------------------	-----------------------------	---

LOC RWY 35

OUTLAW FLD (CKV)

ADF required. RADAR required.	MALS	MISSED APPROACH: Climb to 1800 then climbing right turn to 2200 direct CKV VOR/DME and hold.
⚠ Circling NA W of Rwy 17-35. Circling Rwy 5, 17, 23 NA at night. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Campbell AAF (Fort Campbell) altimeter setting. * DME from CKV VOR/DME.		

ASOS 134.575	CAMPBELL APP CON 134.35 307.025	UNICOM 122.8 (CTAF) 1
------------------------	---	--

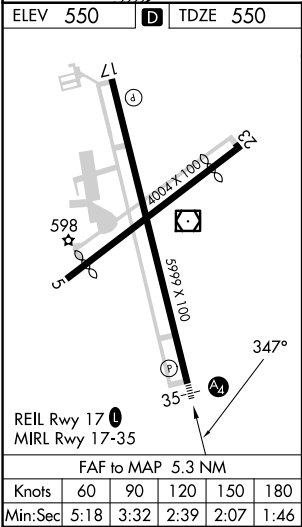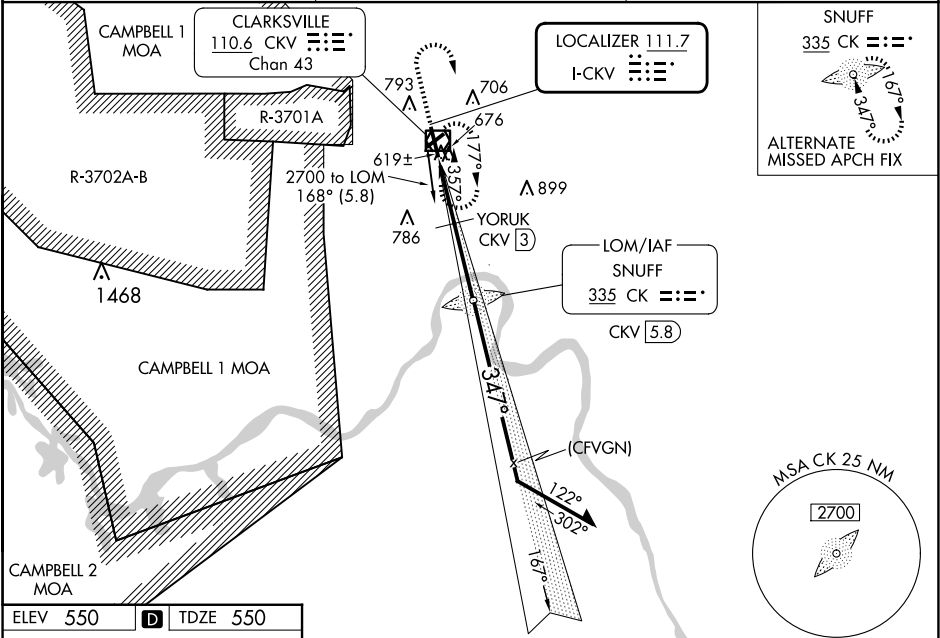

1800	2200	CKV	CK LOM CKV 5.8	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 54). Remain within 10 NM	
167°	347°	2700	1080	2300	
2.5 NM	2.8 NM				
CATEGORY	A	B	C	D	
S-LOC 35	1080-¾	530 (600-¾)	1080-1¼	530 (600-1¼)	
C CIRCLING	1080-1	530 (600-1)	1080-1½ 530 (600-1½)	1200-2 650 (700-2)	
YORUK FIX MINIMUMS * (DME REQUIRED)					
S-LOC 35	880-¾	330 (400-¾)			
C CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1½ 470 (500-1½)	1200-2 650 (700-2)	

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025