

WAAS
CH **58038**
W12A

APP CRS
125°

Rwy Idg
TDZE **1121**
Apt Elev **1125**

RNAV (GPS) RWY 12



NORTHEAST IOWA RGNL (CCY)

▼
▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Waterloo altimeter setting and increase all DA 110 feet and visibilities ¼ mile. Increase all MDA 120 feet and increase LNAV Cat C visibility ¾ mile, and Circling visibility Cat C ½ mile. VDP and Baro-VNAV NA when using Waterloo altimeter setting. Circling Rwy 4-22 and 18-36 NA.

MISSED APPROACH: Climb to 4000 direct IJIBU and hold, continue climb-in-hold to 4000.

AWOS-3 125.525	WATERLOO APP CON ★ 118.9 251.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	--

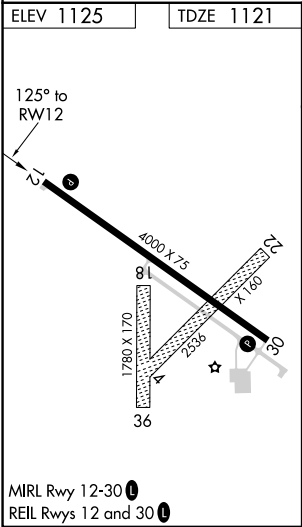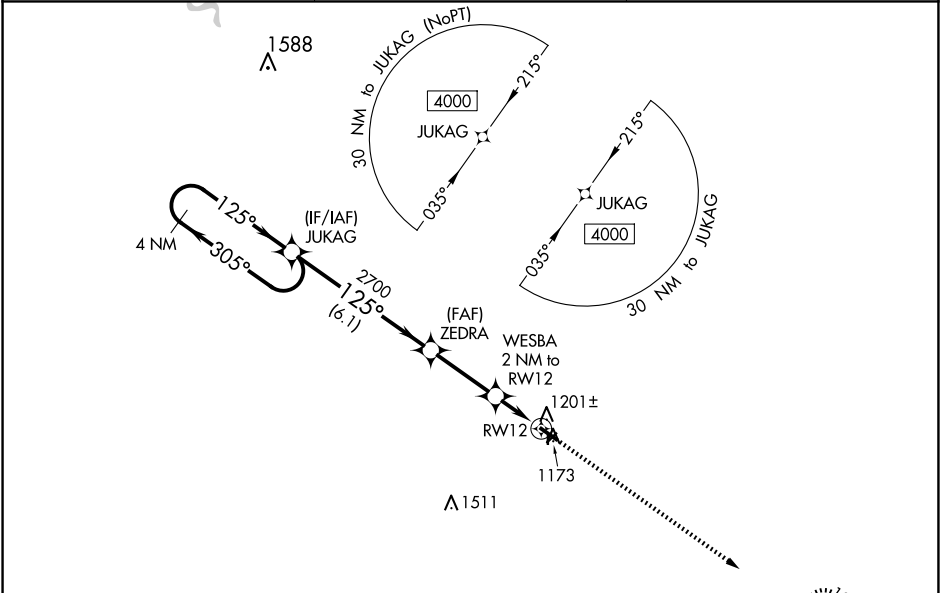

ELEV 1125		TDZE 1121	
125° to RWY 12		4000 X 7.5	
1780 X 170		2536	
36		30	
MIRL Rwy 12-30		REIL Rwy 12 and 30	
CATEGORY		A	
LPV DA		1371-1 250 (300-1)	
LNAV/VNAV DA		1371-1 250 (300-1)	
LNAV MDA		1460-1 339 (400-1)	
CIRCLING		1520-1 395 (400-1)	