

LOC I-SQK
108.35

APP CRS
185°

Rwy Idg
6503
TDZE
866
Apt Elev
866

ILS or LOC RWY 18

METTEL FLD (CEV)

ADF required.



NA

Circling NA to Rwys 4 and 22. For inop MALSR, increase S-LOC 18 Cats C/D visibility to 1½ mile. When local altimeter setting not received, use James M Cox Dayton Intl altimeter setting and increase ILS DA to 1237 feet and visibility all Cats to ¾ mile, increase all MDA 140 feet and LOC Cats C/D visibility to 1½ mile, and Circling Cat B visibility to 1¼ miles and Cat C to 2¾ miles and Cat D to 3 miles. When using James M Cox Dayton Intl altimeter setting: for inop MALSR, increase S-ILS 18 all Cats visibility to 1 mile and increase S-LOC 18 Cat A/B visibility to 1 mile and Cat C/D to 1½ mile.

MALSR

MISSED APPROACH:
Climb to 2800 then
left turn direct SQ LOM
and hold.

AWOS-3 118.325	COLUMBUS APP CON 134.45 352.05	UNICOM 122.8 (CTAF) 1
-------------------	-----------------------------------	--------------------------

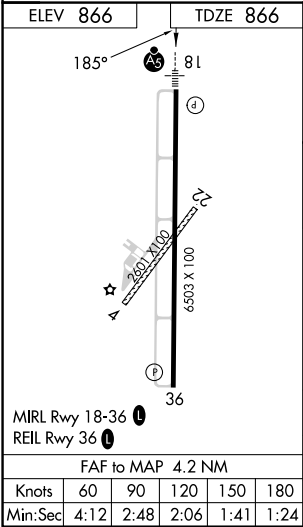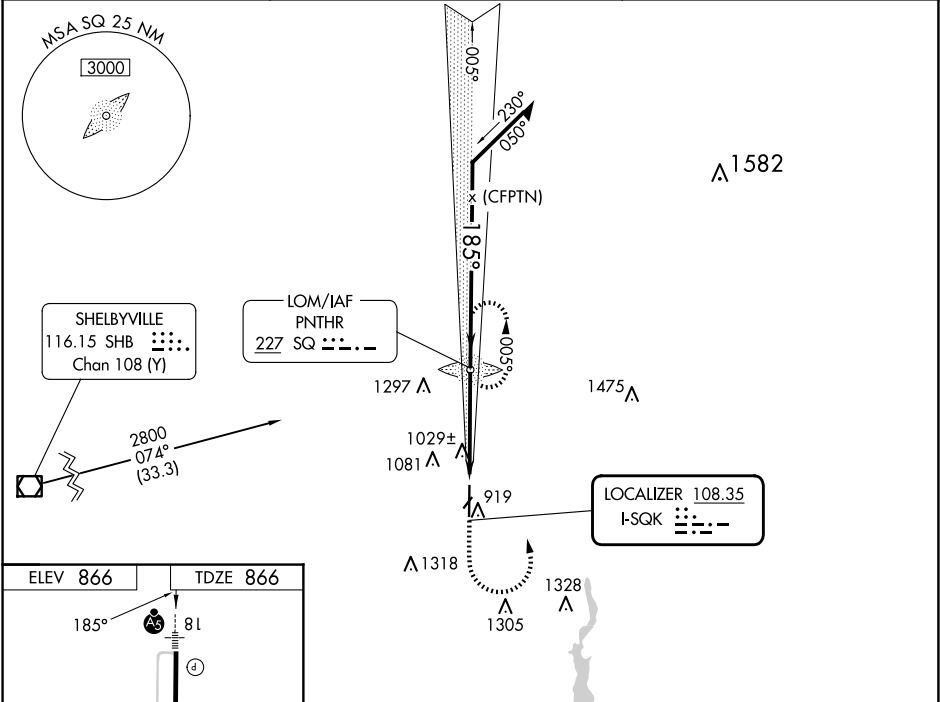

2800 		SQ  	SQ LOM Remain within 10 NM	
		2255 	005° 2800	GS 3.00° TCH 46
4.2 NM			185° 2300	
CATEGORY	A	B	C	D
S-ILS 18	1116-1/2		250 (300-1/2)	
S-LOC 18	1280-1/2	414 (500-1/2)	1280-3/4	414 (500-3/4)
 CIRCLING	1440-1 574 (600-1)	1540-1 674 (700-1)	1620-2 1/4 754 (800-2 1/4)	1620-2 1/2 754 (800-2 1/2)

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025