

WAAS CH 97427 W09A	APP CRS 096°	Rwy Idg TDZE Apt Elev	6579 1321 1328
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

GAYLORD RGNL (GLR)

RNP APCH - GPS.


▼

Circling Rwy 18, 36 NA at night. Baro-VNAV and VDP NA when using GOV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21° C or above 54° C. Inoperative table does not apply to LPV. When local altimeter setting not received, use GOV altimeter setting: increase LPV DA to 1591 feet; increase LNAV/VNAV DA to 1790 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV and Circling visibility Cats C and D ¼ SM. For inoperative ALS when using GOV altimeter setting, increase LNAV/VNAV visibility all Cats to 1 ¾ SM and LNAV visibility Cats C and D to 1 ¾ SM.

MALSR

MISSED APPROACH:
Climb to 3100 direct COBIB and hold.

ASOS 118.375	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

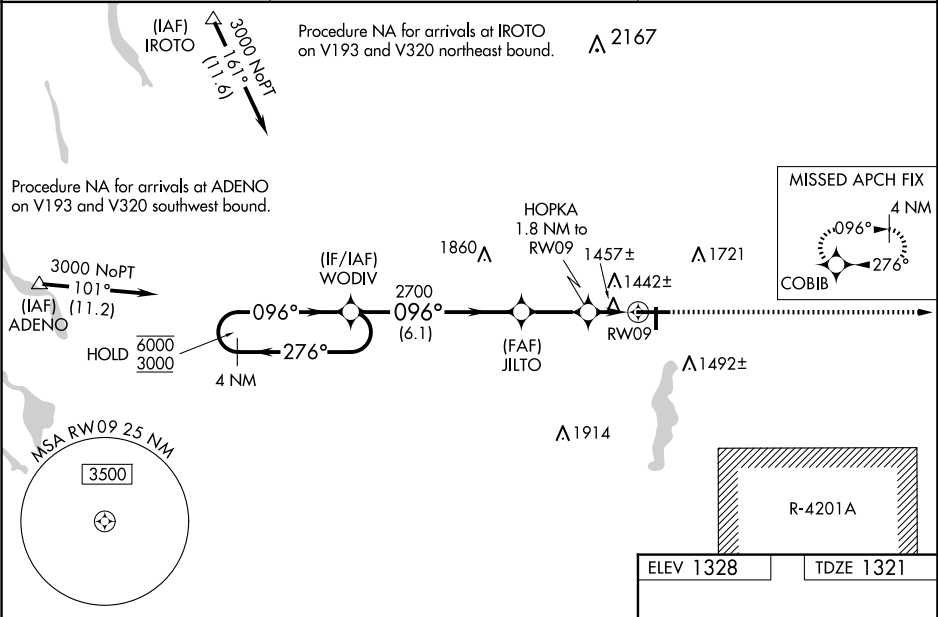

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 38).				3100	COBIB
WODIV							
GP 3.00° TCH 49		6.1 NM 2.4 NM 0.7 NM 1.1 NM					
CATEGORY		A	B	C	D		
LPV DA		1521-¾ 200 (200-¾)					
LNAV/VNAV DA		1720-¾ 399 (400-¾)					
LNAV MDA		1720-¾ 399 (400-¾)					
CIRCLING		1840-1 512 (600-1)	1940-1 612 (700-1)	2040-2 712 (800-2)	2080-2½ 752 (800-2½)		

