

LOC/DME I-SQI
111.5
Chan **52**

APP CRS
252°

Rwy Idg
TDZE
Apt Elev
6499
647
648

ILS or LOC RWY 25

WHITESIDE COUNTY/JOS H BITTORF FLD (SQI)

DME required. Radar required for procedure entry.

MALSR


MISSED APPROACH: Climbing right turn to 3000 on CVA VORTAC R-069 to VOSUY/CVA 47.1 DME and hold.

AWOS-3PT
119.175

ROCKFORD APP CON
126.0 327.0

CLNC DEL
128.0

UNICOM
123.0 (CTAF) 0

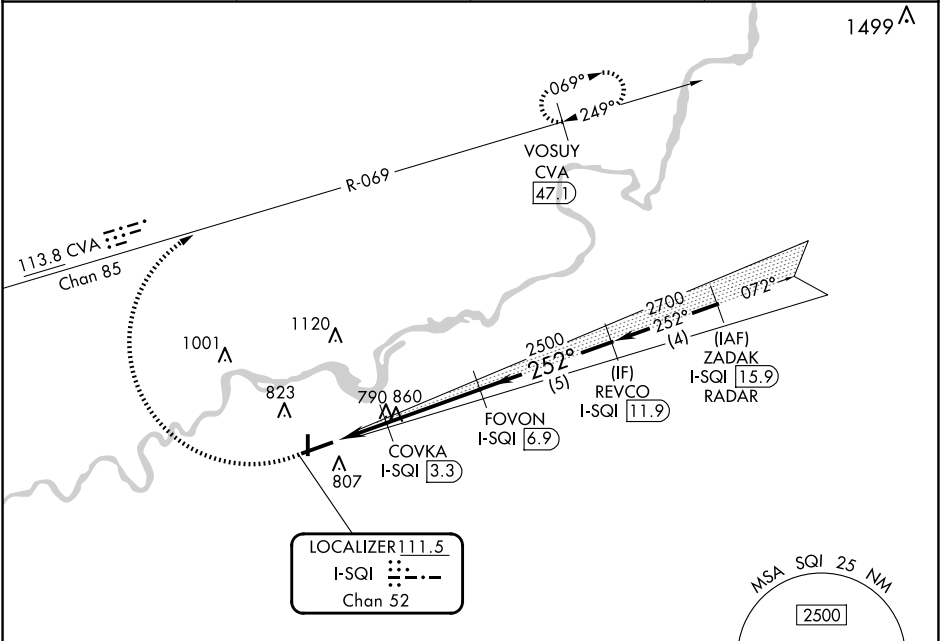

ELEV 648 TDZE 647

Diagram showing the HIRL (High Intensity Runway Lights) and MRL (Medium Intensity Runway Lights) for RWY 25. The HIRL is 3900 x 100 and the MRL is 6499 x 150. The diagram also shows the 252° heading and the 25° turn angle.

CATEGORY	A	B	C	D
S-ILS 25	847-1/2 200 (200-1/2)			
S-LOC 25	1100-1/2 453 (500-1/2)		1100-7/8 453 (500-7/8)	
CIRCLING	1140-1 492 (500-1)		1160-1 1/2 512 (600-1 1/2) 1480-2 3/4 832 (900-2 3/4)	

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025