

LOC I-HYS <u>111.5</u>	APP CRS 339°	Rwy Idg 6501 TDZE 1994 Apt Elev 1999
----------------------------------	------------------------	---

ILS or LOC RWY 34
HAYS RGNL (HYS)

NA ADF required. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16. When local altimeter setting not received, use Russell altimeter setting: increase DA to 2263 feet; increase all MDA 80 feet and visibility S-LOC 34 Cat C and Circling Cat C and D ½ SM. For inoperative MALS when using Russell altimeter setting, increase S-ILS all Cats visibility to 1.


MAISR



MISSED APPROACH: Climb to 2600 then climbing right turn to 3800 direct NETTE LOM/HYS 4.8 DME and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

ADF or DME REQUIRED

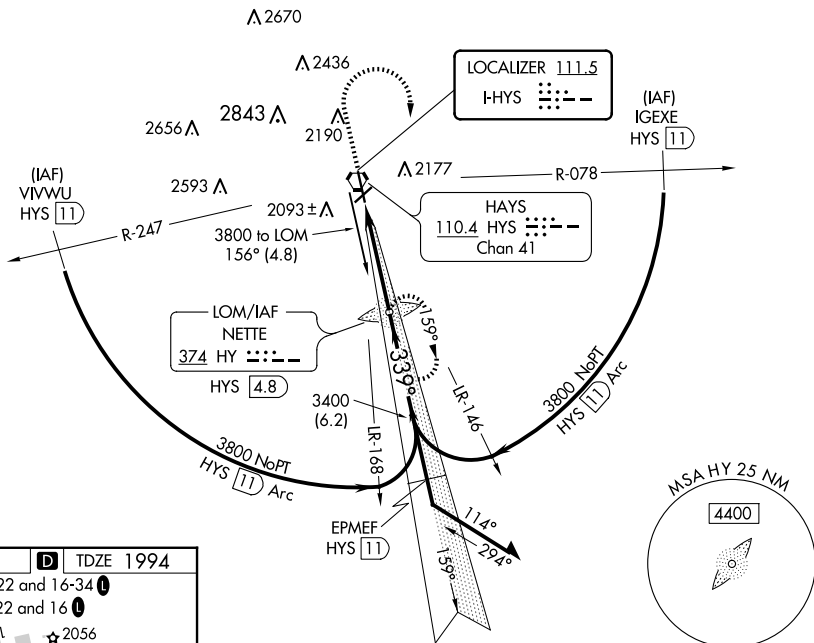

ELEV 1999	D	TDZE 1994			
MIRL Rwy 4-22 and 16-34 L					
REIL Rwy 4, 22 and 16 L					
91 2056 6501 X 100 4501 X 75 34 339° 4.1 NM from FAF to MAP					
FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

