

WAAS CH 90519 W04A	APP CRS 040°	Rwy Idg TDZE Apt Elev	4500 1990 1999
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

HAYS RGNL (HYS)

RNP APCH - GPS.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using RSL altimeter setting. When local altimeter setting not received, use RSL altimeter setting: increase LPV DA to 2309 feet; increase LNAV/VNAV DA to 2459 feet and visibility all Cats ¼ SM; increase all MDA 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16.

MISSED APPROACH: Climb to 4000 direct HOSNI and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

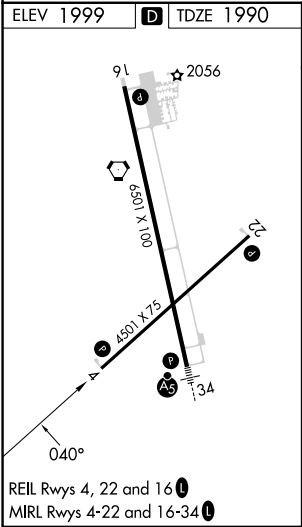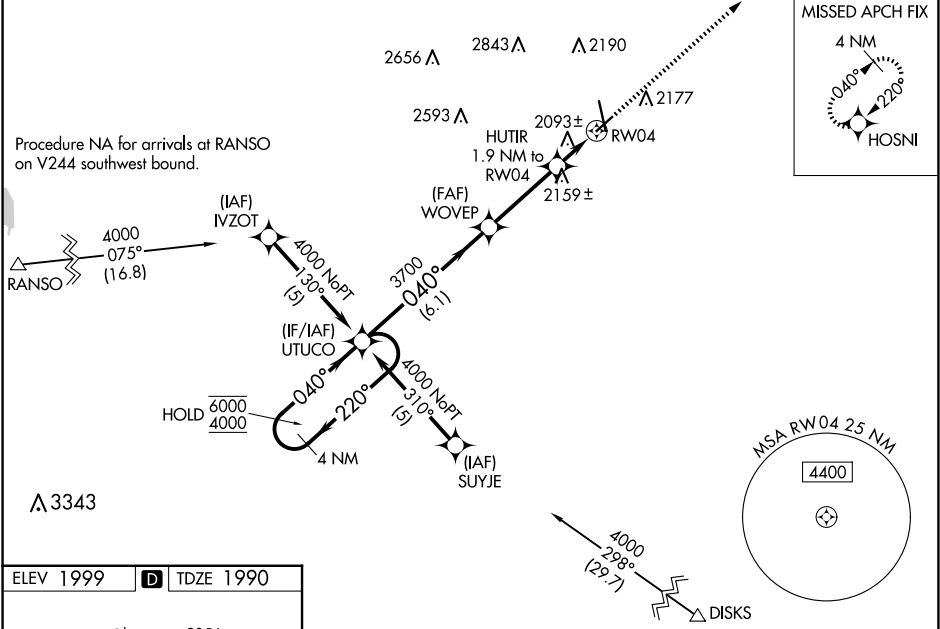

4 NM Holding Pattern 6000 ← 220° 4000 → 040° GP 3.00° TCH 40					UTUCO	WOVEP	HUTIR 1.9 NM to RW04	4000 ↑	HOSNI ✦
					3700	3700	2620	1.2 NM to RW04	RW04
					6.1 NM	3.3 NM	0.7	1.2 NM	
CATEGORY	A		B	C	D				
LPV DA	2240-1 250 (300-1)								
LNAV/VNAV DA	2390-1½ 400 (400-1½)								
LNAV MDA	2420-1	430 (500-1)		2420-1¼ 430 (500-1¼)	2420-1½ 430 (500-1½)				
CIRCLING	2480-1	481 (500-1)		2560-1½ 561 (600-1½)	2680-2¼ 681 (700-2¼)				

NC-2, 17 APR 2025 to 15 MAY 2025

NC-2, 17 APR 2025 to 15 MAY 2025