

WAAS CH 63230 W17A	APP CRS 173°	Rwy Idg TDZE Apt Elev	5501 592 592
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

MC GREGOR EXEC (PWG)


RNP APCH - GPS.

ASR

Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 873 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 873 feet and all visibilities ½ SM; increase all MDAs 40 feet and Circling visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 2500 direct ZUDIS and on track 095° to SATTY and hold.

AWOS-3PT 135.525	WACO APP CON ★ 127.65 352.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
----------------------------	---------------------------------------	-----------------------	---

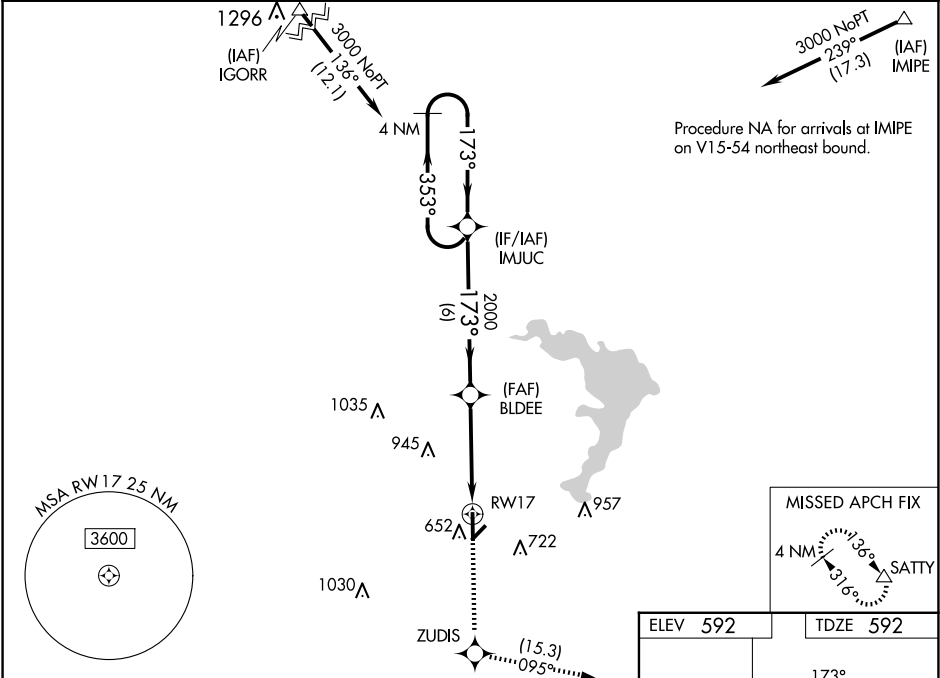

4 NM Holding Pattern IMJUC

3000

353°

173°

GP 3.00° TCH 37

6 NM

3 NM

1.3 NM

2000

173°

BLDEE

2000

1.3 NM to RW17

RW17

CATEGORY	A	B	C	D
LPV DA	842-¾	250 (300-¾)		NA
LNAV/VNAV DA	842-¾	250 (300-¾)		NA
LNAV MDA	1040-1	448 (500-1)	1040-1¾ 448 (500-1¾)	NA
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1300-2 708 (800-2)	NA

ELEV 592

TDZE 592

173°

21

35

3484 X X

55

5501 X 75 0.4% UP

MIRL Rwy 17-35 0

REIL Rwy 17 0