WAAS CH 87130 W35A	APP CRS 353°	Rwy ldg 5501 TDZE 580 Apt Elev 592

RNAV (GPS) RWY 35
MC GREGOR EXEC (PWG)

RNP APCH - GPS.

ASR

Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.

AWOS-3PT	WACO APP CON ★	GCO	UNICOM
135.525	127.65 352.0	121.725	123.05 (CTAF) L

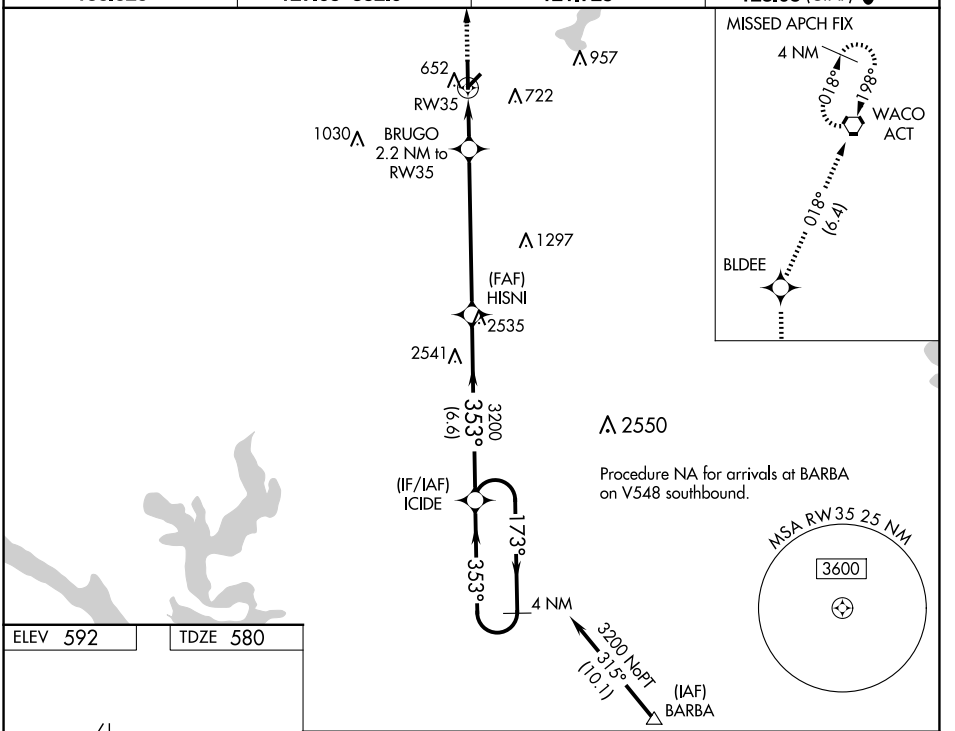

ELEV 592 TDZE 580

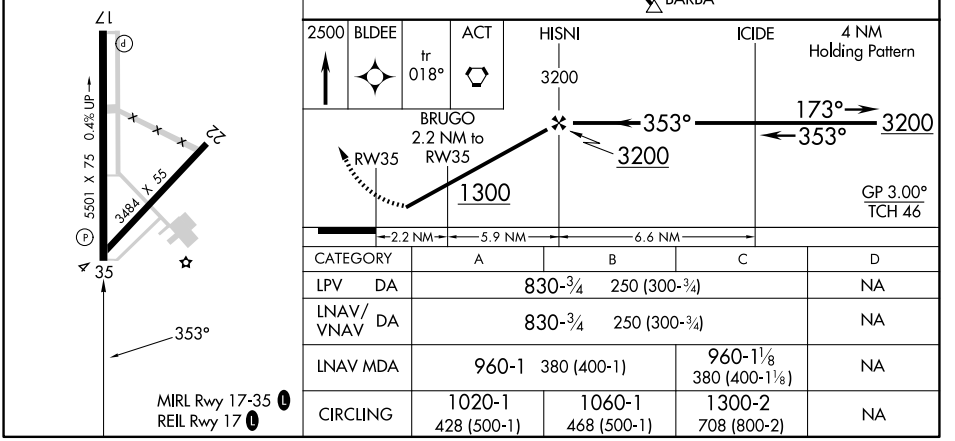

CATEGORY	A	B	C	D
LPV DA	830-¾ 250 (300-¾)			NA
LNAV/VNAV DA	830-¾ 250 (300-¾)			NA
LNAV MDA	960-1 380 (400-1)		960-1⅛ 380 (400-1⅛)	NA
CIRCLING	1020-1 428 (500-1)	1060-1 468 (500-1)	1300-2 708 (800-2)	NA

MIRL Rwy 17-35 L
REIL Rwy 17 L

SC-3, 17 APR 2025 to 15 MAY 2025