
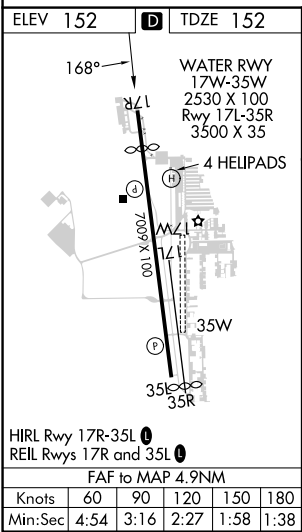


LOC/DME I-HEW 110.5 Chan 42	APP CRS 168°	Rwy Idg 6002 TDZE 152 Apt Elev 152
---	------------------------	---

LOC RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.		MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.
▼ ▲ NA	When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cts C/D visibility ½ mile. Circling NA to Rwys 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.	

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 EAST 118.4 (CTAF) 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

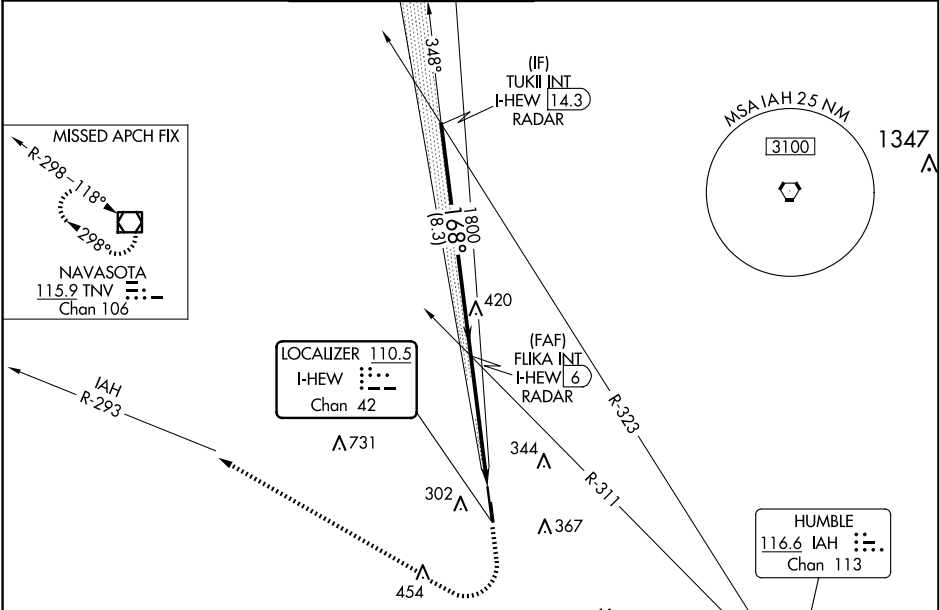

Visual Segment - Obstacles.		1200	2000	IAH R-293	TNV
TUKII INT I-HEW 14.3 RADAR		1200	2000	IAH R-293	TNV
FLIKA INT I-HEW 6 RADAR		1200	2000	IAH R-293	TNV
I-HEW 1.1		1200	2000	IAH R-293	TNV
8.3 NM		4.9 NM			
CATEGORY	A	B	C	D	
S-LOC 17R	640-1	488 (500-1)	640-1½	488 (500-1½)	
☐ CIRCLING	640-1	660-1	680-1½	780-2	
	488 (500-1)	508 (600-1)	528 (600-1½)	628 (700-2)	