

LOC I-JZM	APP CRS	Rwy Idg
108.9	329°	5700
		TDZE
		831
		Apt Elev
		833

ILS or LOC RWY 33


LAWRENCE RGNL (LWC)

When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase DA to 1083 feet; increase all MDAs 60 feet and visibility Cat C ¼ SM.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3100 direct NEWBN LOM and hold.

ASOS	KANSAS CITY CENTER	CLNC DEL	UNICOM
121.225	123.8 343.7	121.825	123.0 (CTAF) 0

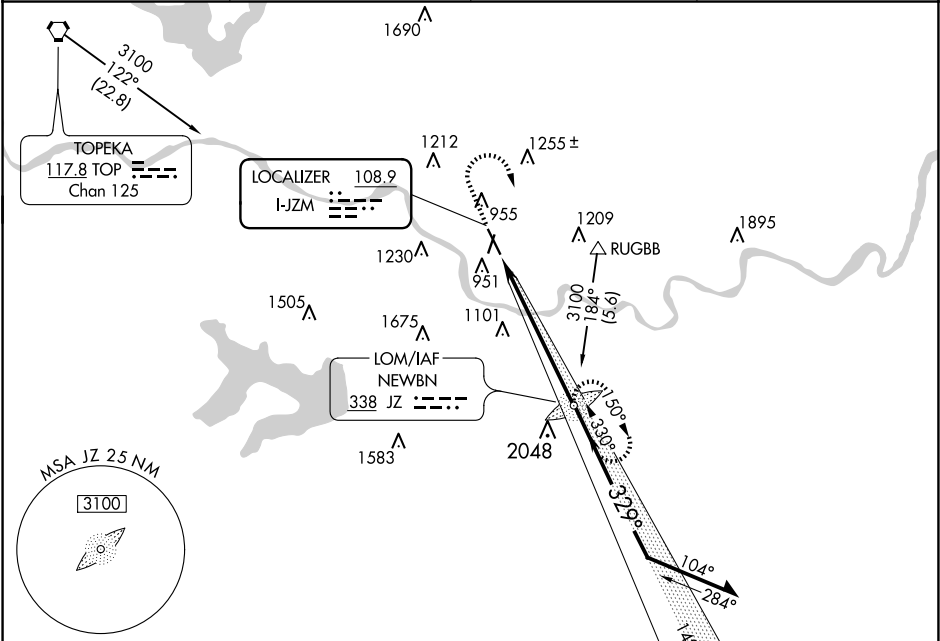

ELEV 833

TDZE 831

MIRL Rwy 1-19 and 15-33

REIL Rwy 1, 15, and 19

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

ADF REQUIRED

2000

3100

JZ

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 52).

JZ LOM

2843

149°

3100

329°

2900

GS 3.00°

TCH 55

CATEGORY	A	B	C	D
S-ILS 33	1031-½ 200 (200-½)			NA
S-LOC 33	1260-½ 429 (500-½)		1260-¾ 429 (500-¾)	NA
CIRCLING	1420-1 587 (600-1)	1480-1 647 (700-1)	1620-2¼ 787 (800-2¼)	NA

NC-2, 17 APR 2025 to 15 MAY 2025

NC-2, 17 APR 2025 to 15 MAY 2025