

LOC I-UCY	APP CRS	Rwy Idg	6503
109.7	006°	TDZE	346
		Apt Elev	346

ILS or LOC RWY 1

EVERETT-STEWART RGNL (UCY)


ADF required. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase S-LOC 1 Cat C/D visibility to 1½ mile, Circling Cat C visibility to 1½ mile and Circling Cat D visibility to 2½ mile. Inop table does not apply to S-ILS 1. For inop ODALS, increase S-LOC 1 Cat C/D visibility to 1½ mile. For inop ODALS when using Dyersburg altimeter setting, increase S-ILS 1 all Cats visibility to ¾ mile and S-LOC 1 Cat D visibility to 1½ mile.

ODALS

MISSED APPROACH:


Climb to 1300 then climbing right turn to 2500 direct OBION LOM and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
135.325	133.65 292.15	122.7 (CTAF) 0

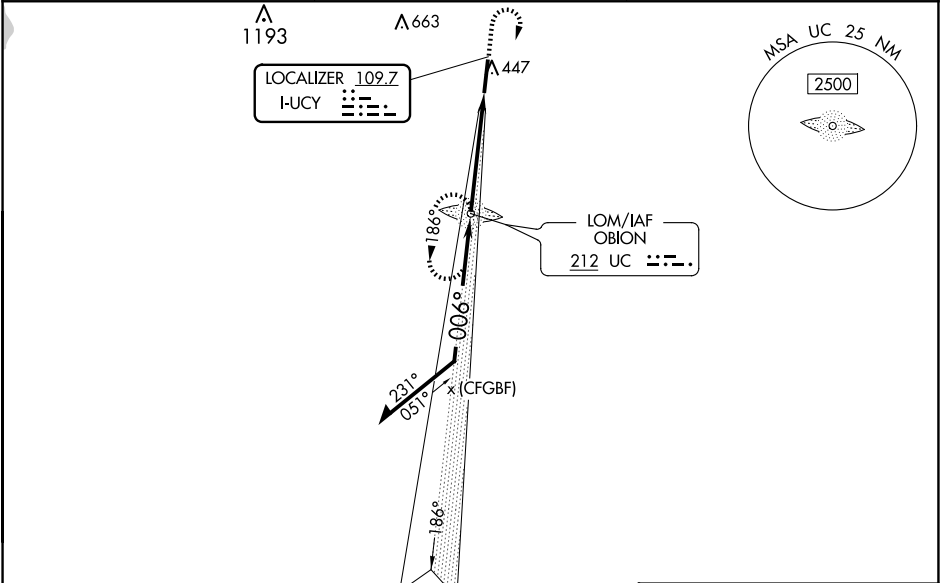


ADF and RADAR

REQUIRED

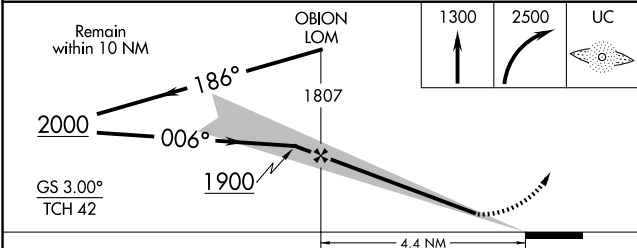

CATEGORY	A	B	C	D
S-ILS 1	546-¾ 200 (200-¾)			
S-LOC 1	820-¾ 474 (500-¾)	820-1¼ 474 (500-1¼)		
CIRCLING	820-1 474 (500-1)	820-1½ 474 (500-1½)	1020-2¼ 674 (700-2¼)	

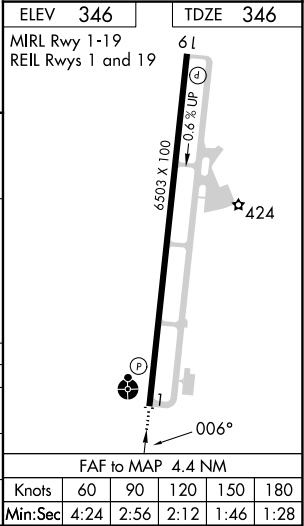

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025