

WAAS CH 97626 W26A	APP CRS 257°	Rwy Idg 10000 TDZE 27 Apt Elev 30
--	------------------------	--

RNAV (GPS) Z RWY 26
JACKSONVILLE INTL (JAX)

RNP APCH-GPS.


For uncompensated baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500 and increase LNAV Cats C/D visibility to RVR 5500.

MALSR





MISSED APPROACH: Climb to 2000 direct UDAQI and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
------------------	-------------------------------------	-----------------------------------	------------------------	---------------------------	-------

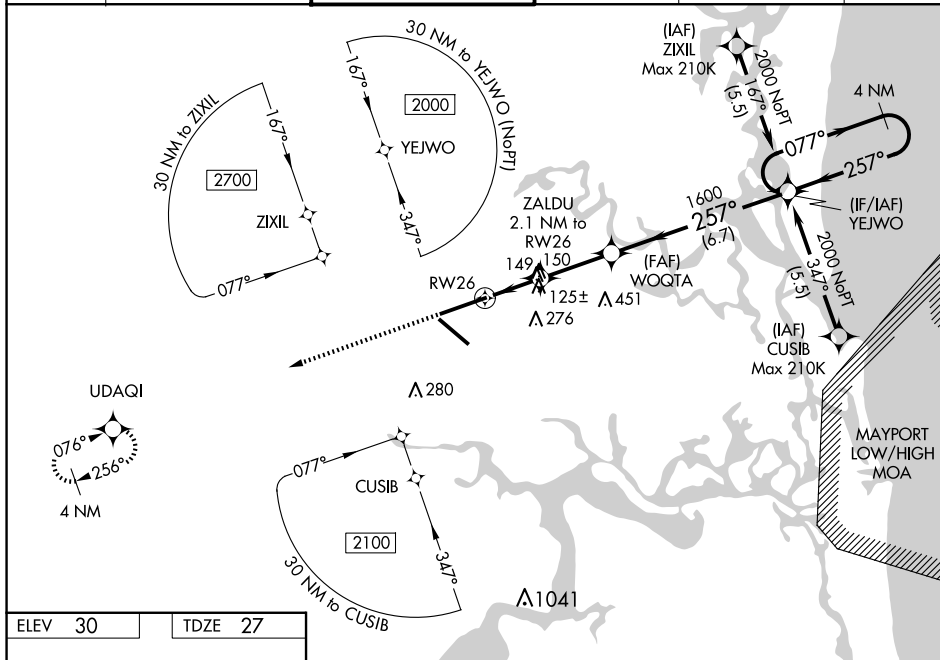

ELEV 30		TDZE 27
---------	--	---------

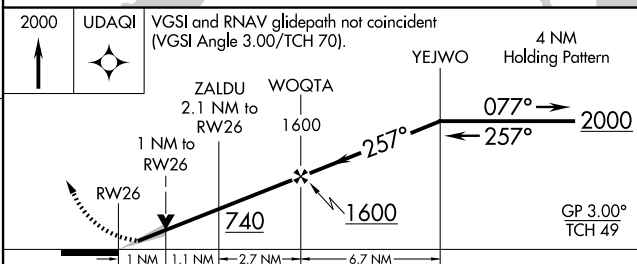

CATEGORY		A	B	C	D
LPV	DA	227/18 200 (200-½)			
LNAV/ VNAV	DA	300/24 273 (300-½)			
LNAV	MDA	400/24 373 (400-½)		400/35 373 (400-⅔)	
CIRCLING		520-1 490 (500-1)		580-1½ 550 (600-1½)	640-2 610 (700-2)

REIL Rwy 32
TDZ/CL Rwy 8, 14, and 26
HIRL Rwy 8-26 and 14-32