

LOC/DME I-CH 111.5 Chan 52	APP CRS 359°	Rwy ldg 5000 TDZE 343 Apt Elev 343
--	------------------------	---

ILS or LOC RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

ADF or DME required.


When local altimeter setting not received, use Lufkin altimeter setting:
increase S-ILS 36 DA to 599 feet; increase all MDA 60 feet and visibility
S-LOC 36 and Circling Cat C and CATEB FIX minimums S-LOC 36 and Circling
Cat C ¼ SM. VDP NA when using Lufkin altimeter setting. Localizer unusable
inside 0.3 NM from threshold. Autopilot coupled approach NA below 740.

MAISLR




MISSED APPROACH: Climb
to 1000 then climbing left turn
to 2100 direct NADOS/OC
NDB and hold.

AWOS-3PT 135.625	HOUSTON CENTER 125.175 285.575	UNICOM 123.0 (CTAF)
----------------------------	--	-------------------------------

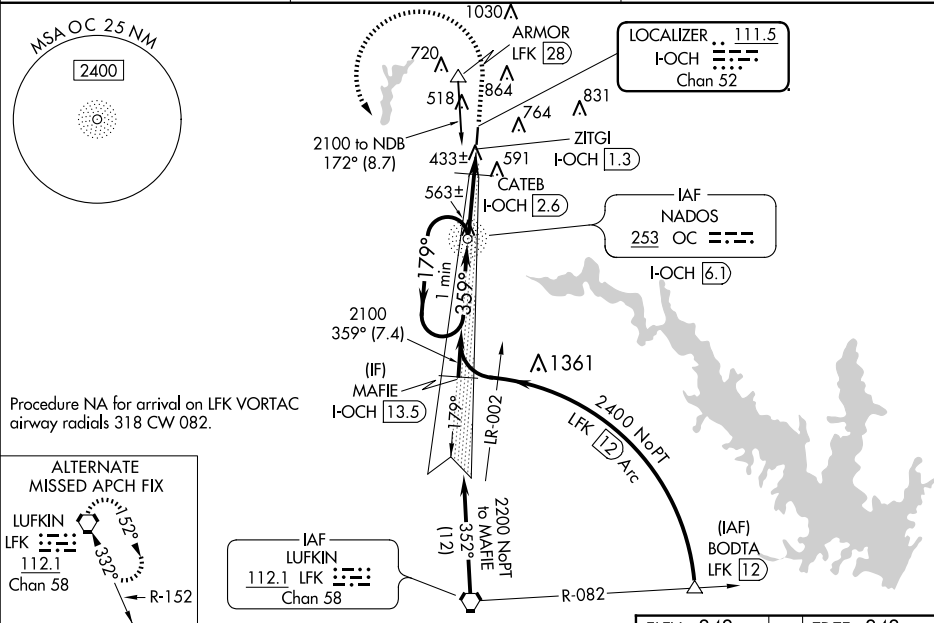

* 820 when using Lufkin altimeter setting.

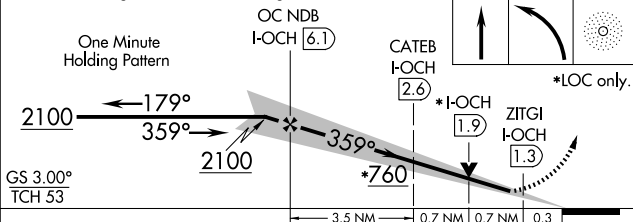

CATEGORY	A	B	C	D
S-ILS 36	543-½ 200 (200-½)			NA
S-LOC 36	760-½	417 (500-½)	760-¾ 417 (500-¾)	NA
CIRCLING	860-1	517 (600-1)	1080-2 737 (800-2)	NA
CATEB FIX MINIMUMS (DME REQUIRED)				
S-LOC 36	700-½	357 (400-½)	700-¾ 357 (400-¾)	NA
CIRCLING	860-1	517 (600-1)	1080-2 737 (800-2)	NA

