

WAAS CH 93720 W22A	APP CRS 218°	Rwy Idg 6032 TDZE 529 Apt Elev 529
--	------------------------	---

RNAV (GPS) RWY 22
TALLADEGA MUNI (ASN)

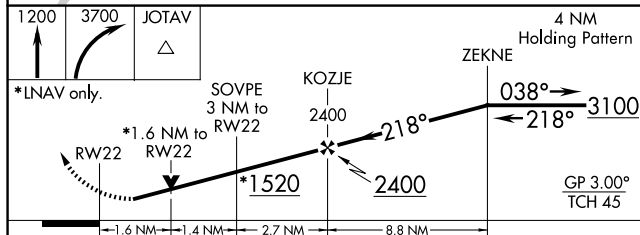
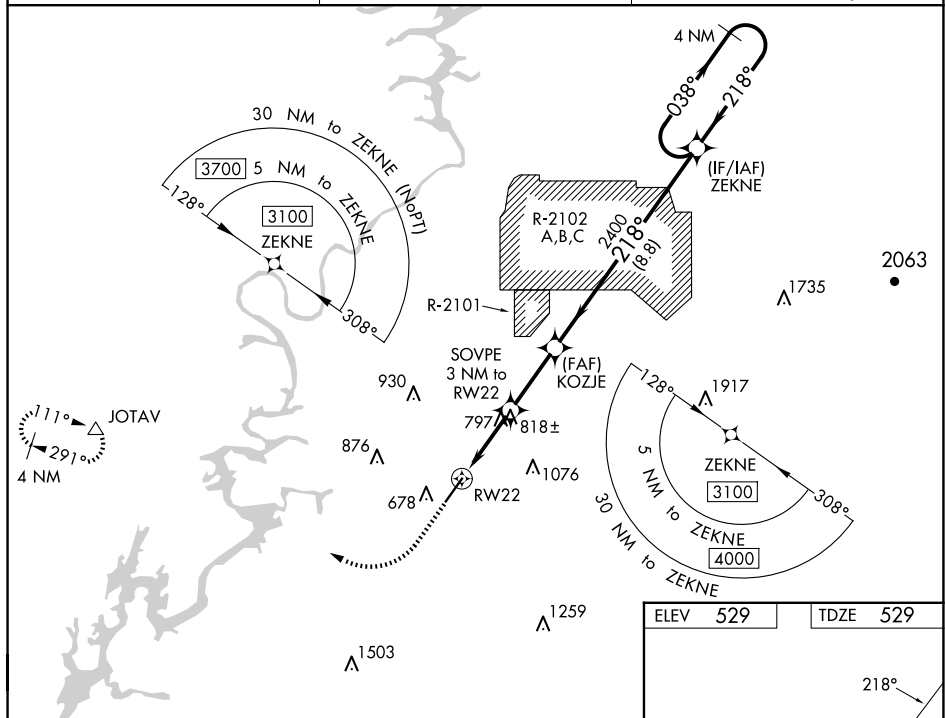
T
A NA

Bara-VNAV NA when using Aniston altimeter setting. For uncompensated Bara-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Aniston altimeter setting. When local altimeter setting not received, use Aniston altimeter setting and increase LPV DA to 856, LNAV/VNAV DA to 1075, and all MDA 40 feet; increase LPV and LNAV/VNAV all Cts visibility and LNAV Cts C/D visibility ½ mile. Increase Circling Cts C visibility ¼ SM, Rwy 22 Helicopter visibility reduction below ¼ SM NA. Increase Circling

MISSED APPROACH: Climb to 1200 then climbing right turn to 3700 direct JOTAV and hold, continue climb in hold to 3700.

AWOS-3PT
118.425

BIRMINGHAM APP CON
132.15 285.45

UNICOM
122.8 (CTAF) **L**

CATEGORY		A	B	C	D
LPV	DA	821-1		292 (300-1)	
RNAV/ VNAV	DA	1040-1 $\frac{3}{4}$		511 (600-1 $\frac{3}{4}$)	
RNAV	MDA	1080-1	551 (600-1)	1080-1 $\frac{5}{8}$	551 (600-1 $\frac{5}{8}$)
C CIRCLING		1140-1 611 (700-1)	1180-1 651 (700-1)	1380-2 $\frac{1}{2}$ 851 (900-2 $\frac{1}{2}$)	1500-3 971 (1000-3)

