WAAS CH 82215 W28A	APP CRS 277°	Rwy ldg 4972 TDZE 1134 Apt Elev 1136

RNAV (GPS) RWY 28
WAYNE COUNTY (BJJ)

T A Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting: increase LPV DA to 1458 feet, LNAV/VNAV DA to 1649 feet, and visibility LPV all Cats ¼ SM and LNAV/VNAV all Cats ⅛ SM; increase all MDA 60 feet and visibility LNAV Cat C/D ⅛ SM and Circling Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct JAVNE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
118.075	125.5 371.875	121.75	122.975 (CTAF) L

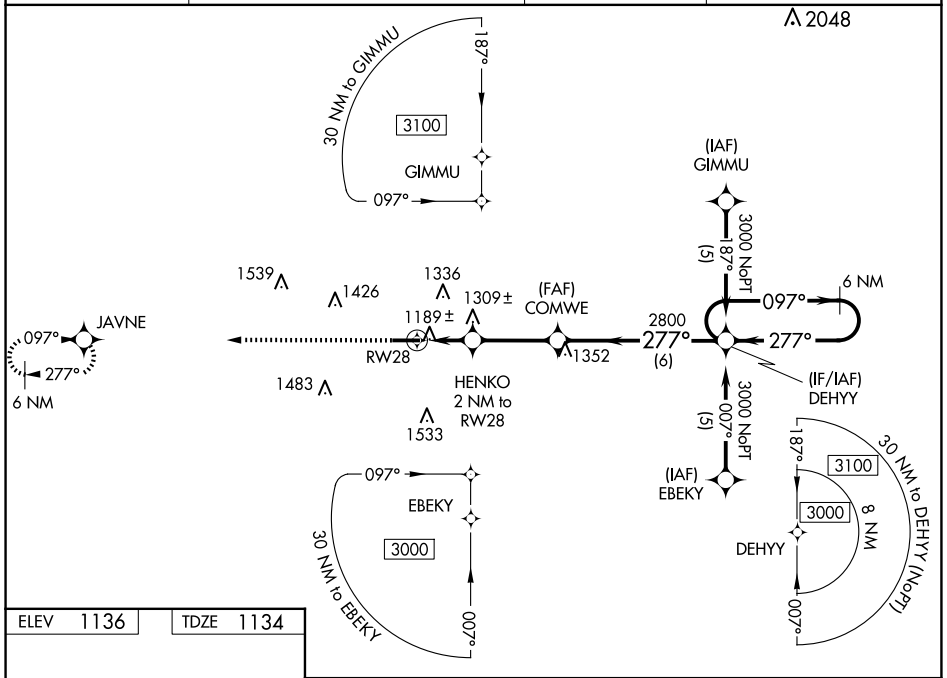

ELEV 1136	TDZE 1134

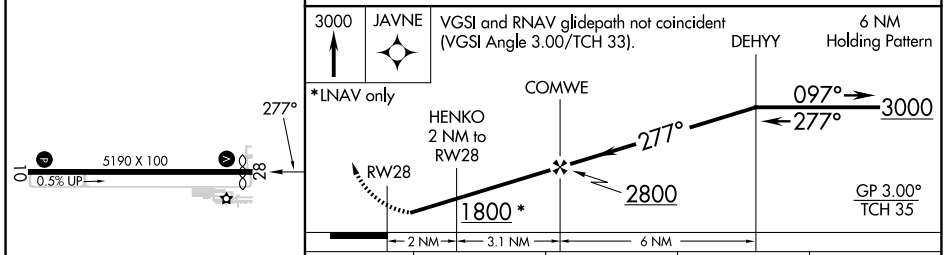

CATEGORY	A	B	C	D
LPV DA	1398-1 264 (300-1)			
LNAV/VNAV DA	1589-1⅝ 455 (500-1⅝)			
LNAV MDA	1560-1 426 (500-1)		1560-1¼ 426 (500-1¼)	
CIRCLING	1600-1 464 (500-1)	1700-1 564 (600-1)	1800-1¾ 664 (700-1¾)	1840-2¼ 704 (800-2¼)

REIL Rwys 10 and 28 L
HIRL Rwy 10-28 L

EC-2, 17 APR 2025 to 15 MAY 2025
EC-2, 17 APR 2025 to 15 MAY 2025