

ILS Y or LOC Y RWY 28
STATESVILLE RGNL (SVH)

▼ When local altimeter setting not received, use Lincolnnton altimeter setting and increase ILS DA to 1219 and all MDA 60 feet; increase S-LOC 28 Cats C/D visibility $\frac{1}{2}$ mile and Girding Cat C visibility $\frac{1}{4}$ mile. VDP NA when using Lincolnnton altimeter setting. For inop MALSR when using Lincolnnton altimeter setting, increase S-ILS 28 all Cats visibility to $\frac{1}{2}$ mile and S-LOC 28 Cats C/D visibility to 1 mile.




MISSED APPROACH: Climb to 1700 then climbing left turn to 3400 on heading 105° and on CLT VOR/DME R-025 to PEGTE INT/I-SVH 13.2 DME and hold.


AWOS-3 119,225	ATLANTA CENTER 125,15 263.0	UNICOM 123,075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------


BARRETTS MOUNTAIN
BZM $\equiv \ddot{\cdot}$
113.75
Chan 84 (Y)

Δ 2323

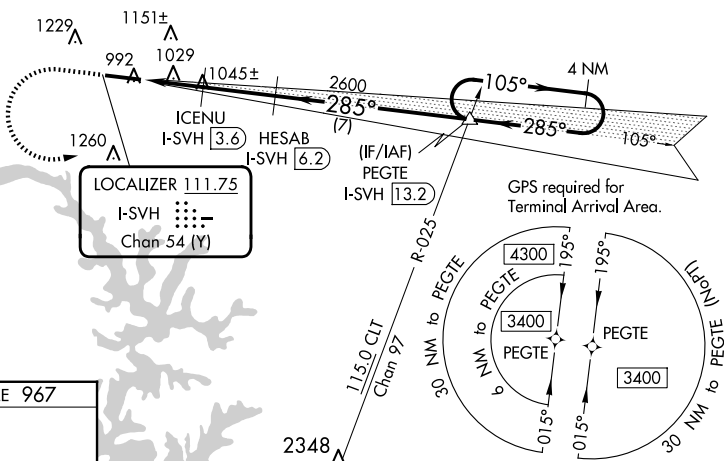

ELEV 968	D	TDZE 967
----------	----------	----------



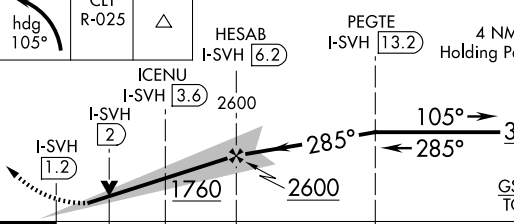1700 ↑	3400 hdg 105°	CLT R-025	PEGTE △				
CATEGORY				A	B	C	D
S-ILS 28		1167-1/2 200 (200-1/2)					
S-LOC 28		1280-1/2 313 (400-1/2)					
CIRCLING		1420-1 452 (500-1)	1540-1 572 (600-1)	1540-1 1/2 572 (600-1 1/2)	1560-2 592 (600-2)		