

WAAS CH 45618 W11A	APP CRS 113°	Rwy Idg 6200 TDZE 2976 Apt Elev 3004
--	------------------------	---

RNAV (GPS) RWY 11
ODESSA-SCHLEMEYER FLD (ODO)

 Circling to Rwy 16 and 20 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA S of Rwy 2 and 34. When local altimeter setting not received use Midland Intl Air and Space Port altimeter setting and increase all DA 41 feet and all MDA 60 feet and increase LNAV/VNAV all Cts visibility 1/8 mile, LNAV Cat C and D and Circling Cat C visibility 1/4 mile. VDP NA with Midland Intl Air and Space Port altimeter setting. Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting.	MALS  MISSED APPROACH: Climb to 5000 direct JEMBI and hold.
---	---

ASOS 119.275	MIDLAND APP CON ★ 124.6 256.875	CLNC DEL 121.7	UNICOM 123.0 (CTAF) 0
------------------------	---	--------------------------	--

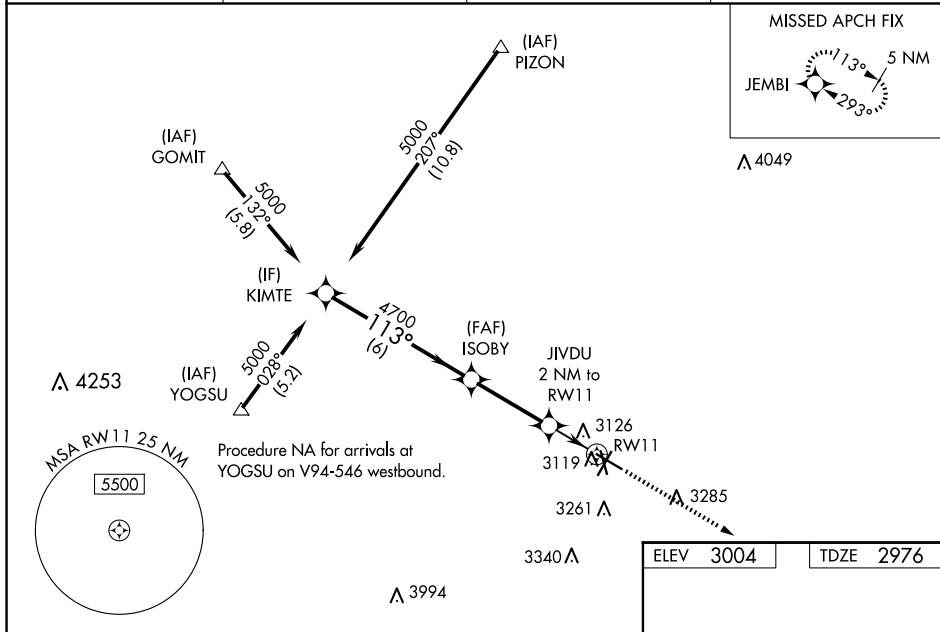


Diagram illustrating a 4th step climb profile. The profile starts at 4700 feet and ends at 5000 feet. Key points include KIMTE (5000), ISOBY (4700), and JIVDU (2 NM to RW11). The profile is divided into four segments: A (6 NM), B (3.2 NM), C (0.8 NM), and D (1.2 NM). The total distance is 11.2 NM. The climb rate is 1.2 NM to RW11. The profile is labeled 'JEMBI' and '113°'. The profile is also labeled 'GP 3.00° TCH 40' and '*3640'. The profile is also labeled '*LNAV only'.

CATEGORY	A	B	C	D
LPV DA	3176-3/4	200 (200-3/4)		
LNAV/VNAV DA	3347-1 1/4	371 (400-1 1/4)		
LNAV MDA	3380-1	404 (400-1)	3380-1 1/8	404 (400-1 1/8)
CIRCLING	3460-1	456 (500-1)	3600-1 1/2 596 (600-1 1/2)	3600-2 596 (600-2)

MIRL Rwy's 2-20, 11-29, and 16-34