



RNP APCH.			MISSED APPROACH: Climb to 4100 direct DIYER and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.			
AWOS-3 118.125	HOUSTON CENTER 134.95 269.4	CLNC DEL 134.95	UNICOM 122.7 (CTAF) 0

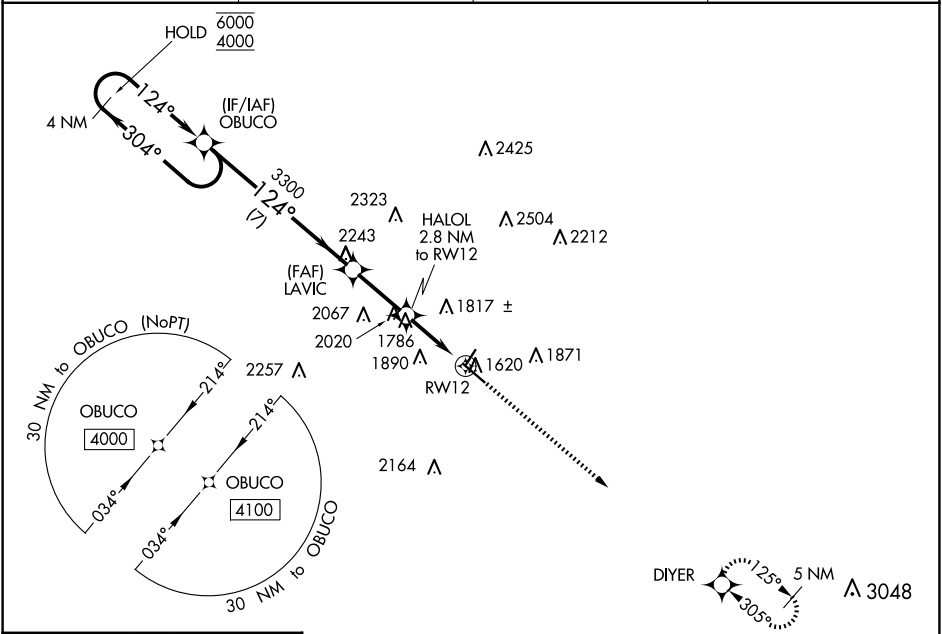

ELEV 1617

D

TDZE 1586

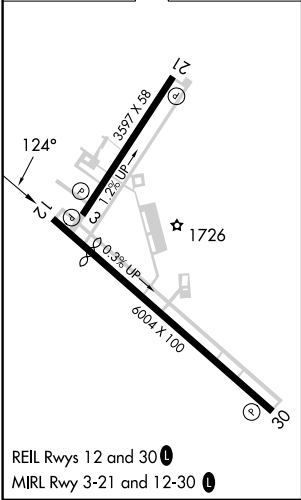

4 NM Holding Pattern

OBUCO

LAVIC

HALOL 2.8 NM to RW12

RW12

GP 3.00° TCH 40

7 NM

2.5 NM

1.5 NM

1.3 NM

4100

DIYER

* LNAV only.

CATEGORY	A	B	C	D
LPV DA	1836-1		250 (300-1)	
LNAV/VNAV DA	1936-1½		350 (400-1½)	
LNAV MDA	2040-1	454 (500-1)	2040-1½	454 (500-1½)
CIRCLING	2320-1 703 (800-1)	2340-1 723 (800-1)	2380-2¼ 763 (800-2¼)	2540-3 923 (1000-3)