


LOC/DME I-APA	APP CRS	Rwy Idg	35R	35L
111.3	350°	TDZE	10001	7001
Chan 50		Apt Elev	5885	5869

ILS or LOC RWY 35R
CENTENNIAL (APA)

DME required for LOC only. RADAR required for procedure entry.	MALSR Rwy 35R	MISSED APPROACH: Climb to 7400 then climbing right turn to 9200 on heading 160° and FQF VORTAC R-197 to HOHUM INT/FQF 22.5 DME and hold.
▼ Rwy 35L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-LOC 35R Cat C/D visibility to 1½ SM. Sidestep and Circling Rwy 35L NA at night.		

ATIS 120.3	DENVER APP CON 132.75 269.3	CENTENNIAL TOWER 118.9	GND CON 121.8	CLNC DEL 128.6
---------------	--------------------------------	---------------------------	------------------	-------------------

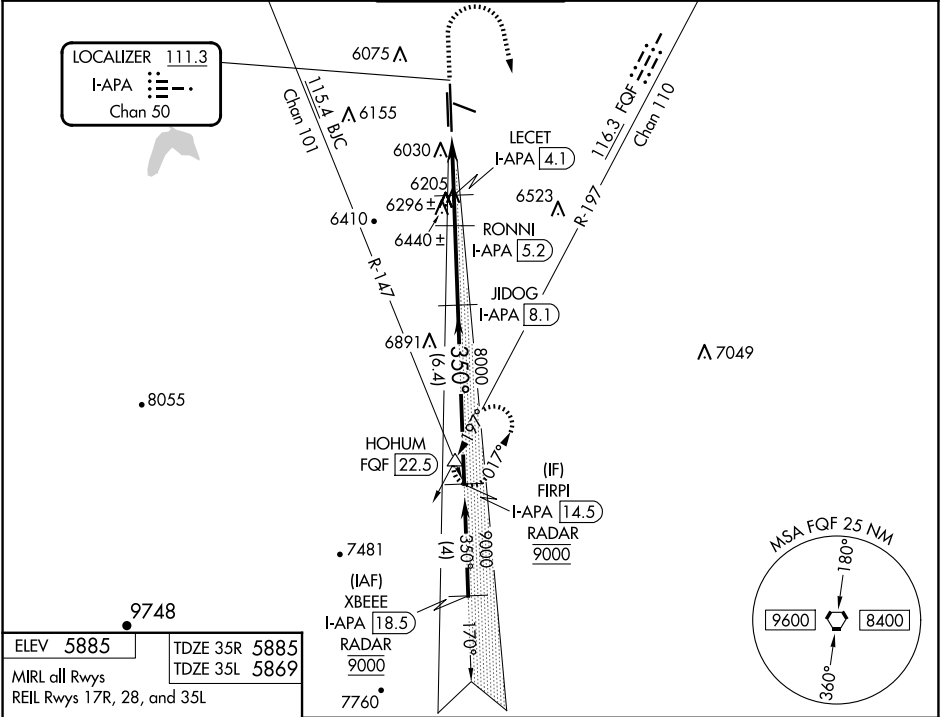

7400	9200	FQF R-197	HOHUM	JIDOG	FIRPI
↑	hdg 160°	△	RONNI	I-APA 8.1	I-APA 14.5
			LECET	I-APA 4.1	RADAR
			I-APA 3.5	I-APA 1.8	
			6700	7060	8000
			1.7 NM	0.7	1.1 NM
			2.9 NM	6.4 NM	
CATEGORY	A	B	C	D	
S-ILS 35R	6085-½	200 (200-½)			
S-LOC 35R	6460-½	575 (600-½)	6460-1¼	575 (600-1¼)	
SIDESTEP 35L	6460-1	591 (600-1)	6460-1½	591 (600-2)	6460-2
CIRCLING	6460-1	6540-1	6740-2½	6760-2¾	875 (900-2¾)