

WAAS
CH **72824**
W16A

APP CRS
157°

Rwy Idg
TDZE
Apr Elev

5000
413
413

RNAV (GPS) RWY 16

MC COMB/PIKE COUNTY/JOHN E LEWIS FLD (MCB)

RNP APCH.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM.

MALSF

MISSED APPROACH:
Climb to 3000 direct
GLADS and hold.

ASOS 119.025	HOUSTON CENTER 126.8 327.8	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	----------------------------------

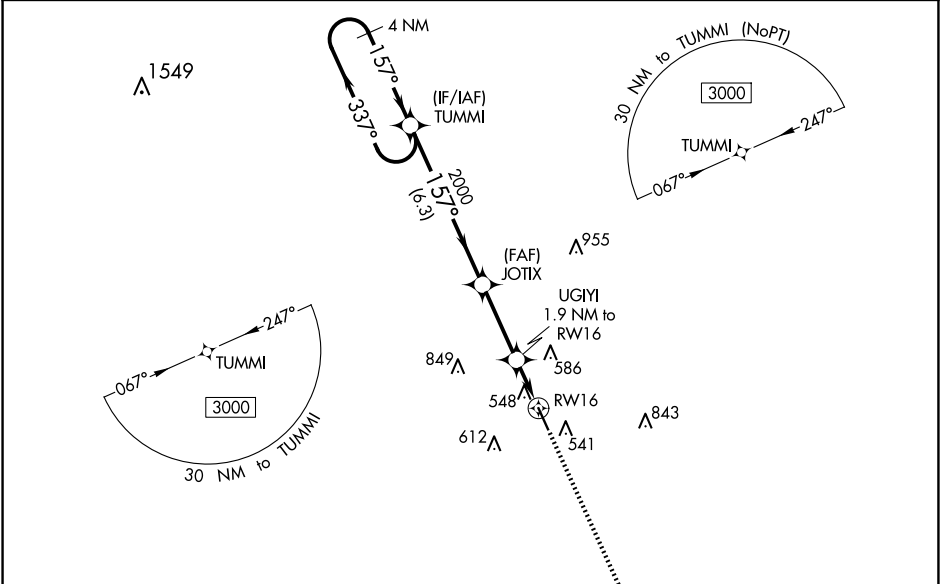

ELEV **413**

TDZE **413**

157° to RW16

5000 x 100

0.3% Up

34

MISSED APCH FIX

GLADS

157°

337°

4 NM

4 NM Holding Pattern

TUMMI

3000

337°

157°

157°

JOTIX 2000

UGIYI 1.9 NM to RW16

*1.1 NM to RW16

RW16

GP 3.00°

TCH 42

2000

*1060

6.3 NM

3 NM

0.8

1.1

3000

GLADS

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		615- ³ / ₄	202 (300- ³ / ₄)	
LNAV/VNAV DA		709- ³ / ₄	296 (300- ³ / ₄)	
LNAV MDA	800- ³ / ₄	387 (400- ³ / ₄)	800- ⁷ / ₈	387 (400- ⁷ / ₈)
CIRCLING	880-1	467 (500-1)	940-1 ¹ / ₂ 527 (600-1 ¹ / ₂)	1160-2 ¹ / ₂ 747 (800-2 ¹ / ₂)