


WAAS CH 70501 W28A	APP CRS 279°	Rwy Idg TDZE Apt Elev	2502 108 108
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 28
BLOCK ISLAND STATE (BID)

DME/DME RNP-0.3 NA. If local altimeter setting not received, use Westerly State altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV and VDP NA when using Westerly State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).	MISSED APPROACH: Climb to 1500 direct CUGDA and on track 287° to SUFOK and hold.
--	--

AWOS-3PT 134.775	PROVIDENCE APP CON ★ 125.75 319.2	CLNC DEL 120.1	UNICOM 123.0 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

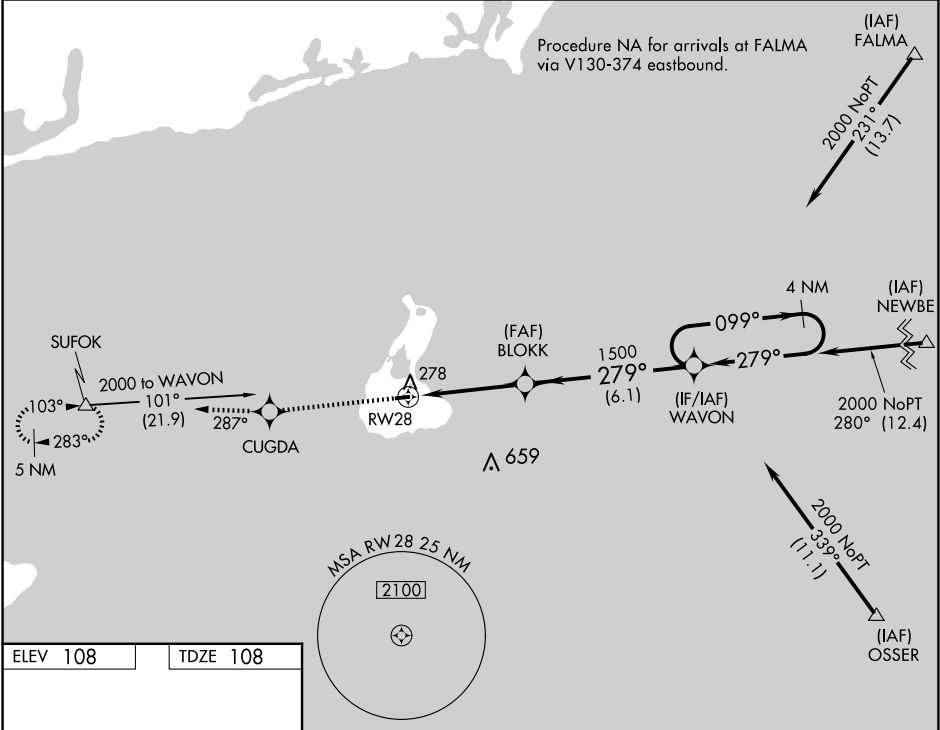

ELEV 108	TDZE 108
----------	----------

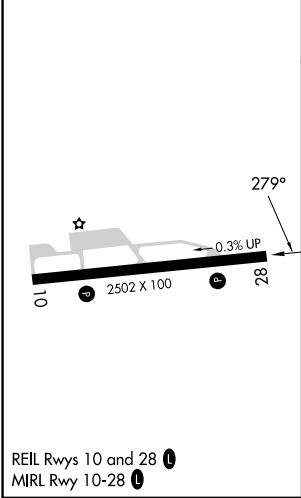

1500	CUGDA	tr 287°	SUFOK	
				WAVON 4 NM Holding Pattern
				BLOKK
				279°
				099°
				2000
				GP 3.00° TCH 37
				1.3
				2.9 NM
				6.1 NM
CATEGORY	A	B	C	D
LPV DA	358-1	250 (300-1)		NA
LNAV/VNAV DA	570-1¼	462 (500-1¼)		NA
LNAV MDA	540-1	432 (500-1)	540-1¼ 432 (500-1¼)	NA
CIRCLING	640-1	532 (600-1)	640-1½ 532 (600-1½)	NA