

ORLANDO, FLORIDA

AL-5793 (FAA)

23334



WAAS CH 42900 W33A	APP CRS 333°	Rwy Idg TDZE Apt Elev	6001 82 82
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 33

T Baro-VNAV NA when using Orlando Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Helicopter visibility reduction below ¼ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all LPV DA to 359, all LNAV/VNAV DA to 429, and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 540 then
climbing left turn to
2000 direct CAMBE
and hold.

ATIS	ORLANDO APP CON	KISSIMEE TOWER ★	CLNC DEL	CLNC DEL	GND CON	UNICOM
128.775	119.4 351.9	124.45 (CTAF) ①	121.7	123.95 (when twr closed)	121.7	122.95

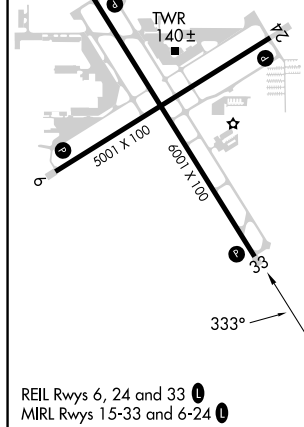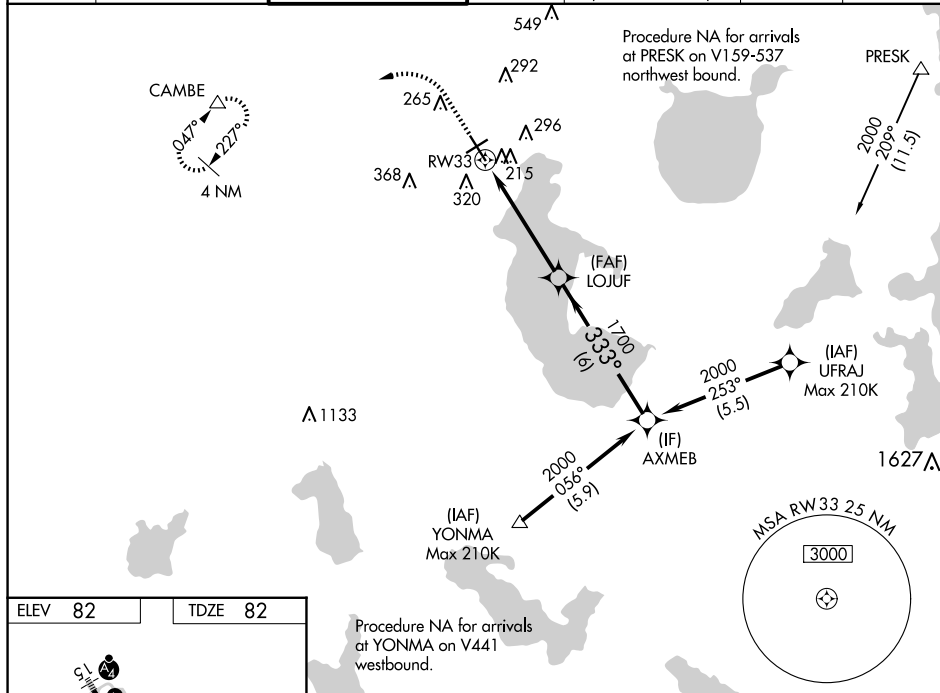

540 ↑	2000 ↖	CAMBE △				
CATEGORY	A		B	C	D	
LPV DA	332-1		250 (300-1)			
LNAV/ VNAV	402-1		320 (400-1)			
LNAV MDA	480-1 398 (400-1)		480-1½		398 (400-1½)	
CIRCLING	620-1 538 (600-1)		680-1½ 598 (600-1½)		700-2 618 (700-2)	

ORLANDO, FLORIDA
Amdt 2C 19MAY22

28°17'N-81°26'W

KISSIMMEE GATEWAY (ISM)
RNAV (GPS) RWY 33

SE-3, 17 APR 2025 to 15 MAY 2025