


WAAS CH 40138 W22A	APP CRS 226°	Rwy Idg TDZE Apt Elev	4003 421 421
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 22

HUMBOLDT MUNI (M53)

RNP APCH - GPS.	
▼ ▲ NA Circling Rwy 4 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Jackson altimeter setting, when not received, use Dyersburg altimeter setting: increase LPV all Cats DA to 749; increase LNAV/VNAV all Cats DA to 817 and all Cats visibility ½ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¼ mile.	MISSED APPROACH: Climb to 3000 direct CAVTO and hold.

MKL ASOS 119.325	MEMPHIS CENTER 134.65 316.15	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

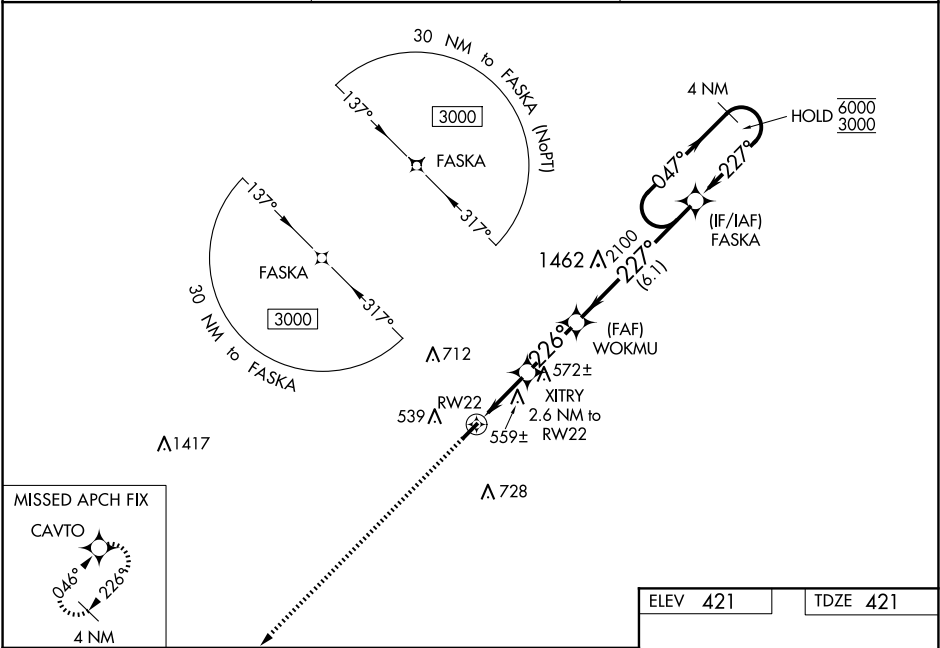

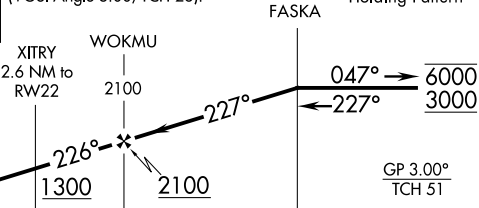3000	CAVTO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).		4 NM Holding Pattern	
					
CATEGORY		A	B	C	D
LPV DA			701-1	280 (300-1)	
LNAV/ VNAV DA			770-1	349 (400-1)	
LNAV MDA		840-1	419 (500-1)	840-1 ½	419 (500-1 ½)
 CIRCLING		900-1 479 (500-1)	920-1 499 (500-1)	1120-2 699 (700-2)	1120-2 ¼ 699 (700-2 ¼)

