

WAAS CH 90511 W09A	APP CRS 091°	Rwy Idg TDZE Apt Elev	5000 125 125
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9L

BARTOW EXEC (BOW)

RNP APCH.


▼

⚠

Rwy 9L helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 548 feet, LNAV/VNAV DA to 645 feet and all MDA 120 feet, increase LNAV Cat C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct IVONY and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

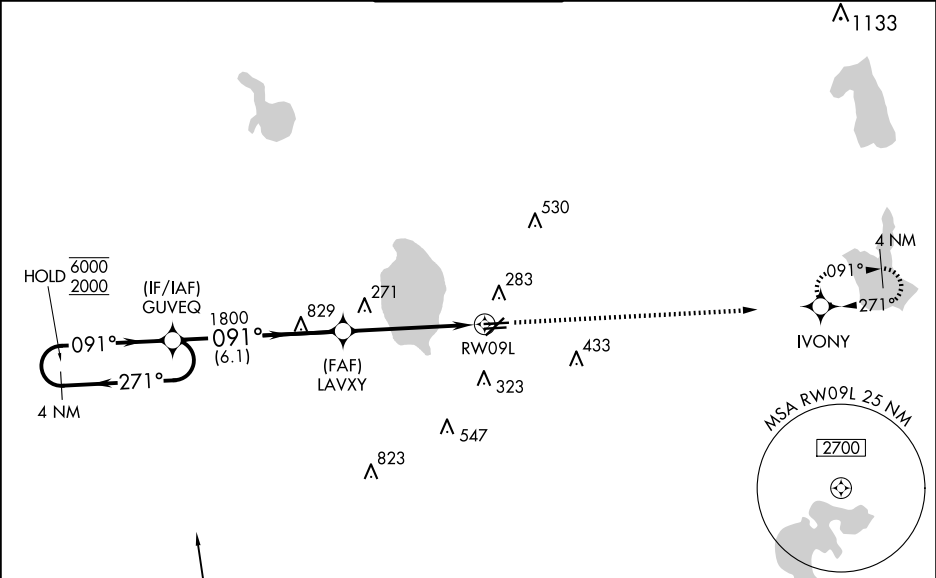

Procedure NA for arrival at CROWD on V7 southbound and V509 southeast bound.

ELEV 125

TDZE 125

205±

TWR 194

5000 X 150

4416 X 150

271

0.3% UP

5000

5000

100

4 NM Holding Pattern

GP 3.00° TCH 45

6000 2000

271° 091°

GUEVQ

LAVXY

1800

1800

6.1 NM

3.9 NM

1.2

RWY 09L

2000

IVONY

*LNAV only.

*1.2 NM to RWY 09L

CATEGORY	A	B	C	D
LPV DA	442-1¼ 317 (400-1¼)			
LNAV/VNAV DA	539-1½ 414 (500-1½)			
LNAV MDA	540-1 415 (500-1)		540-1¼ 415 (500-1¼)	

MIRL Rwy 5-23 and 9L-27R

REIL Rwy 5, 23, 9L and 27R