

WAAS CH 86827 W12A	APP CRS 120°	Rwy Idg TDZE 1452 Apt Elev 1456
--	------------------------	---

RNAV (GPS) RWY 12

ELY MUNI (ELO)


▼

▲

Baro-VNAV NA when using Cook altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 34°C (93°F). DME/DME RNP-0.3 NA. VDP NA when using Cook altimeter setting. When local altimeter setting not received, use Cook altimeter setting and increase all DA/MDA 100 feet; increase LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ⅜ mile all Cats, and LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 4100 direct ODASE and hold.

AWOS-3PT 132.025	MINNEAPOLIS CENTER 127.9 281.45	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

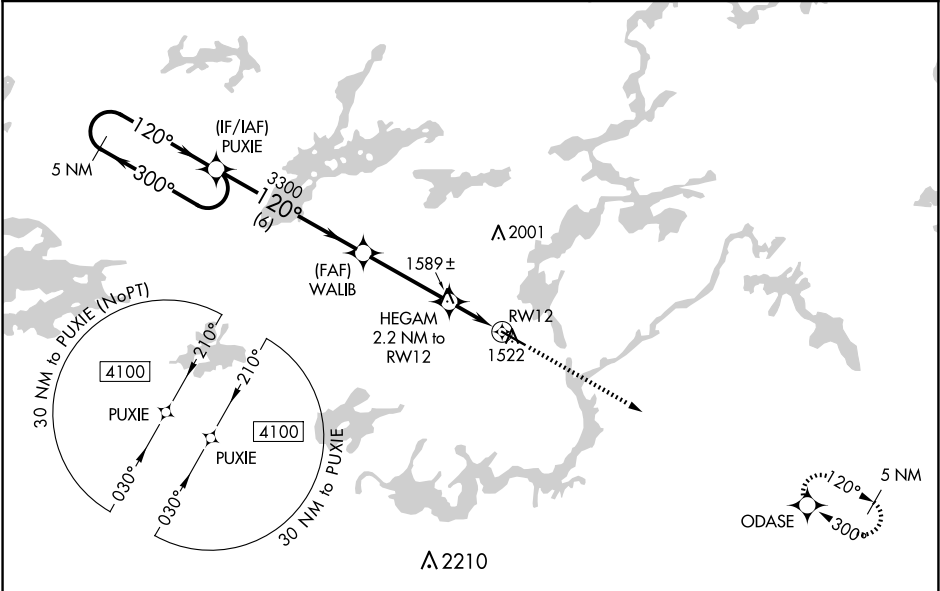

					ELEV 1456		TDZE 1452	
5 NM Holding Pattern 4100 ← 300° GP 3.00° TCH 40 120° → 3300 6 NM 3.5 NM 1.1 NM 1.1 NM 4100 ODASE *LNAV only. *2160 *1.1 NM to RW12 120° to RW12 5596 X 100 30 PUXIE WALIB HEGAM 2.2 NM to RW12 RW12					120° to RW12 5596 X 100 30			
CATEGORY	A		B	C	D			
LPV DA	1652-1 200 (200-1)							
LNAV/VNAV DA	1726-1 274 (300-1)							
LNAV MDA	1840-1 388 (400-1)				1840-1½ 388 (400-1½)			
CIRCLING	1920-1 464 (500-1)		1940-1 484 (500-1)		1940-1½ 484 (500-1½)		2360-3 904 (1000-3)	
					MIRL Rwy 12-30 1 REIL Rws 12 and 30 1			