


WAAS CH 77929 W11A	APP CRS 111°	Rwy Idg 5091 TDZE 1988 Apt Elev 1989
--	------------------------	---

RNAV (GPS) RWY 11
L M CLAYTON (OLF)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokaf FLD/Glasgow-Valley County altimeter setting: increase LPV DA to 2329 ft and visibility $\frac{3}{8}$ SM, LNAV/VNAV DA to 2407 ft and visibility $\frac{1}{2}$ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D $\frac{1}{2}$ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4800 direct
CARAV and hold.

ASOS 118,325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

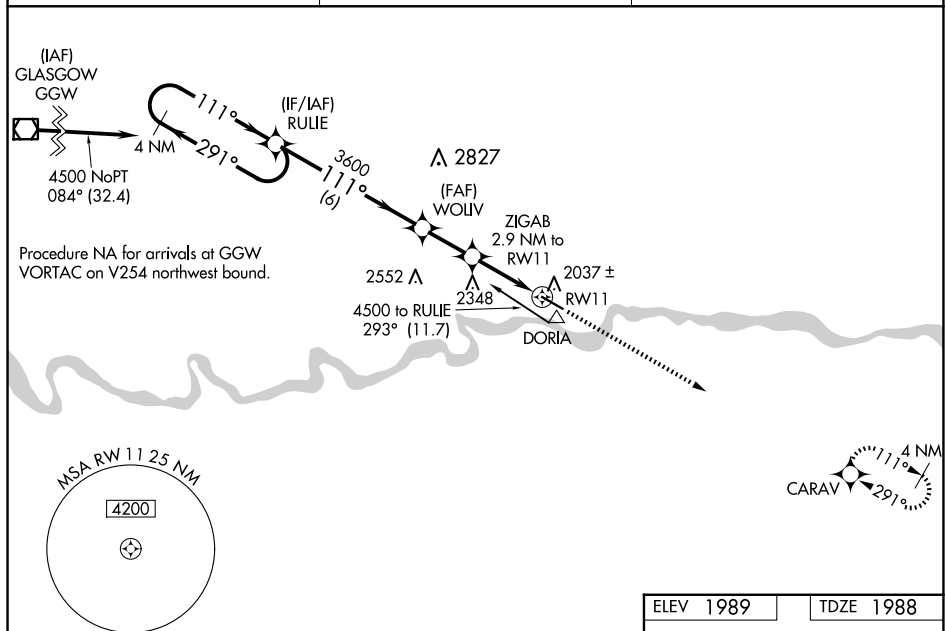

4 NM Holding Pattern

RULIE

WOLIV

ZIGAB
2.9 NM to RW11

4500 ← 291°
111° →

3600

*2940

*1.5 NM to RW11

RW11

GP 3.00°
TCH 40

6 NM

2 NM

1.4 NM

1.5 NM

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00°/TCH 28).

4800

CARAV

* LNAV only

CATEGORY	A	B	C	D
LPV DA	2188- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/ VNAV DA	2266- ⁷ / ₈ 278 (300- ⁷ / ₈)			
LNAV MDA	2500-1	512 (600-1)	2500-1 ³ / ₈	512 (600-1 ³ / ₈)
CIRCLING	2500-1	511 (600-1)	2660-2 671 (700-2)	2780-2 ¹ / ₂ 791 (800-2 ¹ / ₂)