
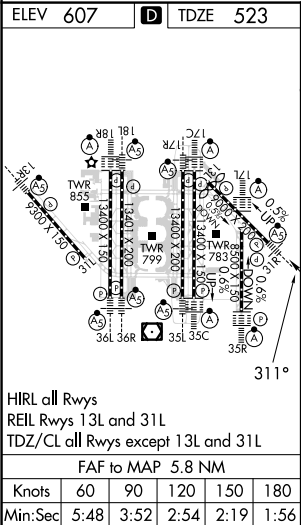


LOC/DME I-RRR	APP CRS	Rwy Idg	8373
110.9	311°	TDZE	523
Chan 46		Apt Elev	607

ILS or LOC RWY 31R

DALLAS-FORT WORTH INTL (DFW)

Simultaneous approach authorized. DME required. For inop ALS increase S-LOC 31R GUKSE FIX minimums Cat C/D visibility to RVR 5500.		MALSR	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 125° and TTT VOR/ DME R-084 to SOLD0/TTT 35.8 DME and hold.		
D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	135.5 125.2	126.55 127.5 124.15 134.9	121.65 121.8 EAST 121.85 WEST	128.25	

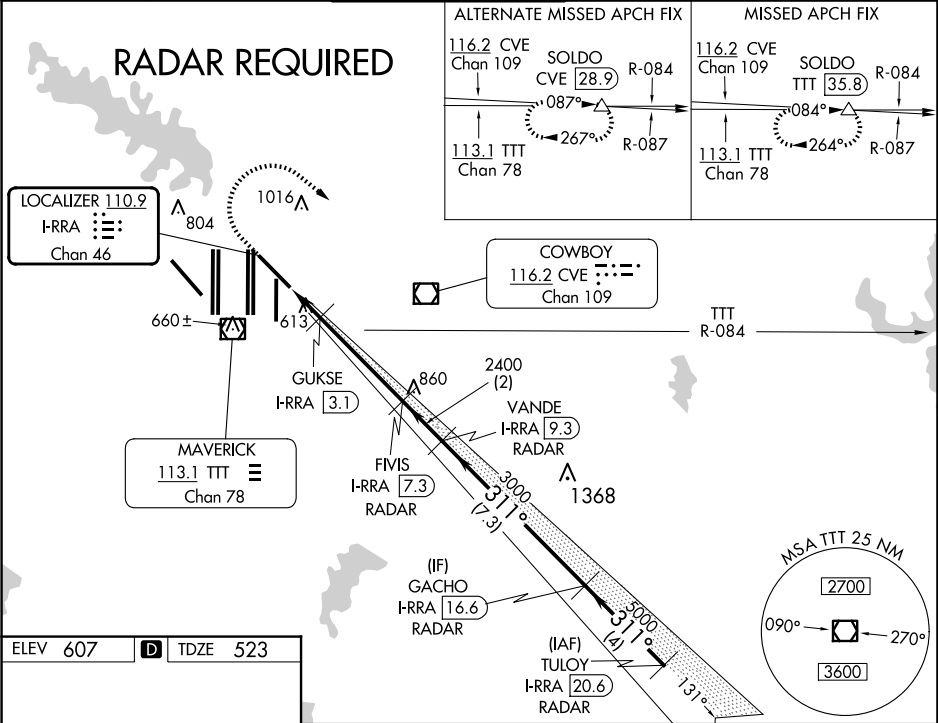

1100	3000	TTT R-084	SOLD0 △						
↑	hdg 125°			FVMS I-RRR [7.3] RADAR	VANDE I-RRR [9.3] RADAR	GACHO I-RRR [16.6] RADAR	TULOY I-RRR [20.6] RADAR		
*LOC only.				GUKSE I-RRR [3.1] RADAR	311° 5000				
I-RRR [1.6]				I-RRR [2.5]	2400	3000	5000	GS 3.00° TCH 53	
0.9				0.6	4.2 NM	2 NM	7.3 NM	4 NM	
CATEGORY	A		B		C		D		
S-ILS 31R	723/18 200 (200-½)								
S-LOC 31R	1060/24 537 (500-½)				1060/55 537 (500-1¼)				
GUKSE FIX MINIMUMS									
S-LOC 31R	880/24 357 (300-½)				880/30 357 (300-¾)				