

WAAS CH 82020 W35A	APP CRS 352°	Rwy Idg 4201 TDZE 2012 Apt Elev 2012
--	------------------------	---




RNAV (GPS) RWY 35

RNP APCH.

▼ Baro-VNAV NA when using Great Bend altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 35 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Great Bend altimeter setting and increase all DA 49 feet and LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM; increase all MDA 60 feet and increase LNAV Cat C and Circling Cat C visibility $\frac{1}{4}$ SM. Circling NA to Rwy 4, 12, 22 and 30. Procedure NA at night.

MISSED APPROACH:
Climb to 4500 direct
CULMI and hold.

AWOS-2 119.875	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

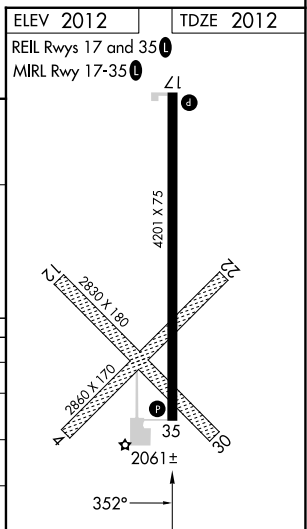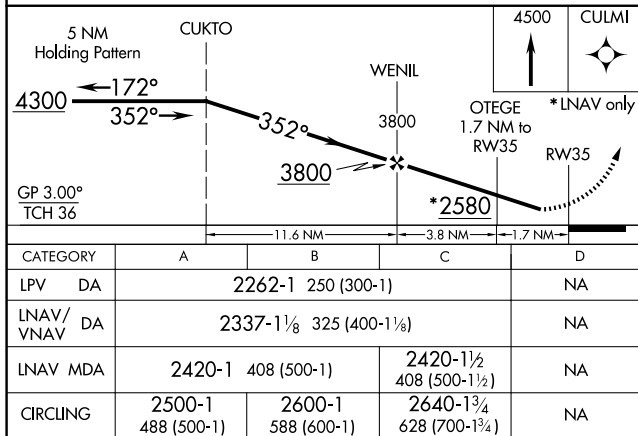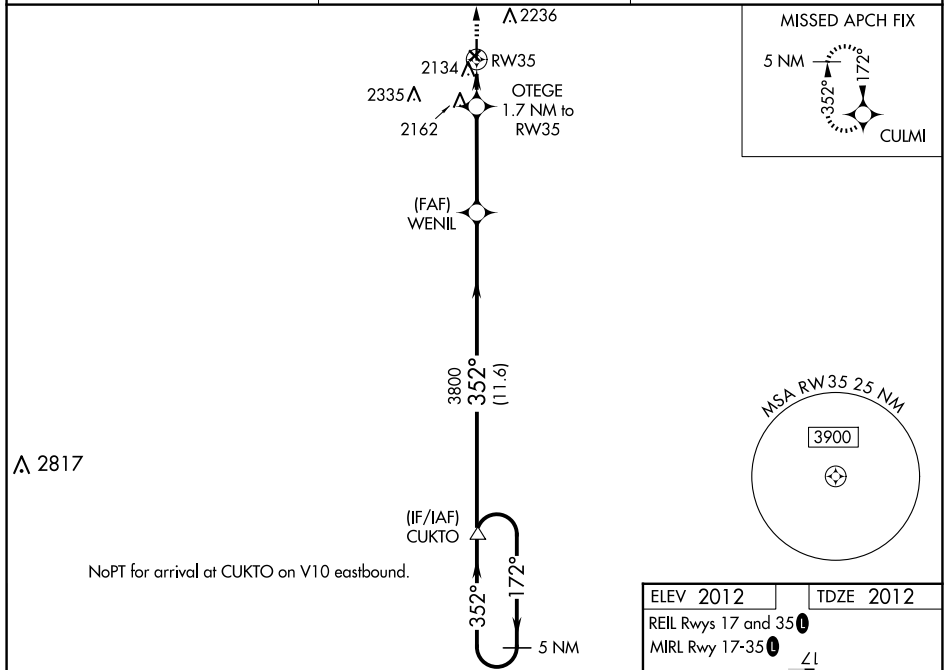

NC-2, 17 APR 2025 to 15 MAY 2025