

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>63216</b><br><b>W15A</b> | APP CRS<br><b>151°</b> | Rwy Idg<br>TDZE <b>236</b><br>Apt Elev <b>236</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 15

RICHMOND EXEC/CHESTERFIELD COUNTY (F'CI)

RNP APCH.



▽

△NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Richmond Intl altimeter setting and increase all DA 36 feet, and all MDA 40 feet, increase LNAV/VNAV all Cats visibility ¼ mile. VDP and Baro-VNAV NA when using Richmond Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct PUBBS and hold.

|                            |                                        |                          |                                  |
|----------------------------|----------------------------------------|--------------------------|----------------------------------|
| AWOS-3PT<br><b>128.625</b> | POTOMAC APP CON<br><b>126.75 307.2</b> | CLNC DEL<br><b>124.6</b> | UNICOM<br><b>123.05 (CTAF) 1</b> |
|----------------------------|----------------------------------------|--------------------------|----------------------------------|

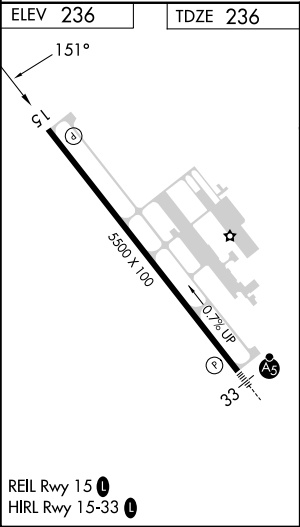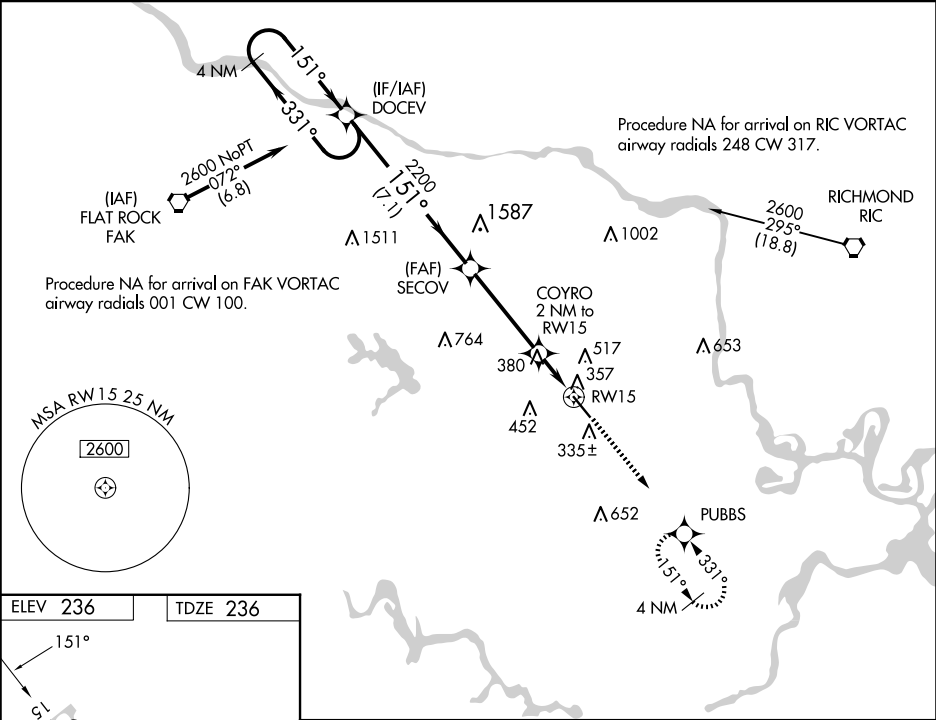

|              |                      |              |                        |                        |        |       |
|--------------|----------------------|--------------|------------------------|------------------------|--------|-------|
|              | 4 NM Holding Pattern | DOCEV        | SECOV                  | COYRO 2 NM to RW15     | 2000   | PUBBS |
|              | 2600                 | 331°         | 151°                   | 151°                   | 2200   | *900  |
|              | GP 3.00° TCH 43      |              |                        |                        |        |       |
|              |                      | 7.1 NM       | 3.9 NM                 | 0.7 NM                 | 1.3 NM |       |
| CATEGORY     | A                    | B            | C                      | D                      |        |       |
| LPV DA       | 486-1                | 250 (300-1)  |                        |                        |        |       |
| LNAV/VNAV DA | 692-1½               | 456 (500-1½) |                        |                        |        |       |
| LNAV MDA     | 680-1                | 444 (500-1)  | 680-1¾<br>444 (500-1¾) | 680-1½<br>444 (500-1½) |        |       |