


LOC I-DSY 110.1 Chan 38	APP CRS 011°	Rwy Idg TDZE 253 Apt Elev 265
---	------------------------	---

ILS or LOC RWY 1
SEARCY RGNL (SRC)

ADF required.		MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 2300 direct CERCY LOM and hold, continue climb-in-hold to 2300.
Circling NA for Cats B and C west of Rwy 1-19. VDP NA when using Bill and Hillary Clinton Nil/Adams Fld altimeter setting. When local altimeter setting not received, use Bill and Hillary Clinton Nil/Adams Fld altimeter setting: increase ILS DA to 542 feet; increase all MDAs 100 feet and S-LOC 1 Cat C and Circling Cat C visibility ¼ SM. For inop ALS, increase S-LOC 1 Cat C visibility to 1 SM.			
AWOS-3PT 128.325	LITTLE ROCK APP CON 119.75 291.775	CLNC DEL 119.75	UNICOM 122.7 (CTAF) 

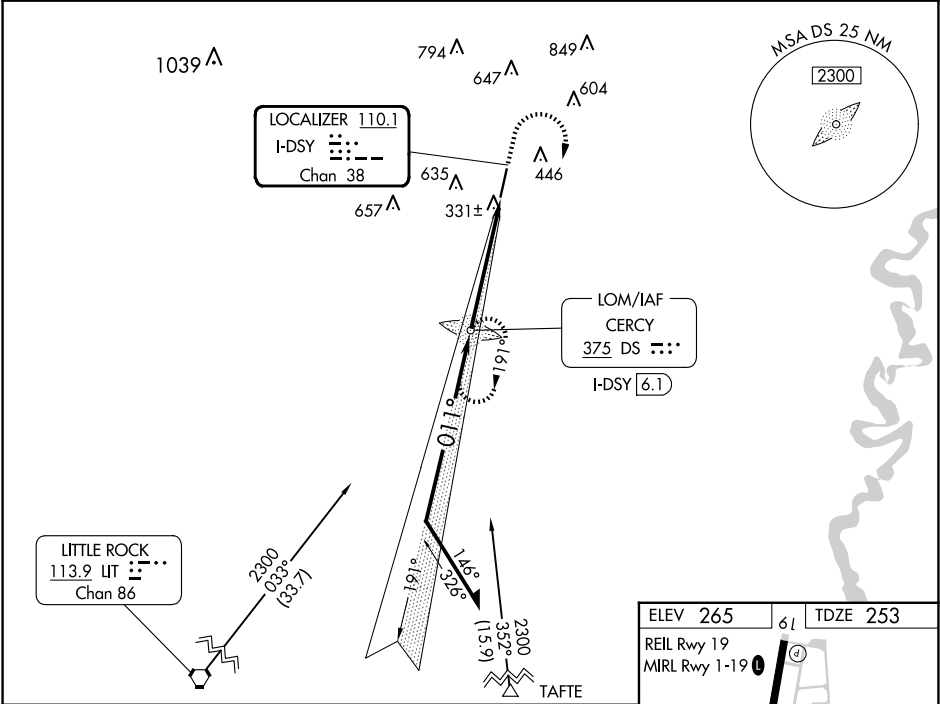

Remain within 10 NM		DS LOM CERCY I-DSY 6.1	800	2300	DS
2300		191°	1877	DS	
GS 3.00° TCH 54		011°	1900	I-DSY 2.1	I-DSY 1.2
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 57).		4 NM	1 NM		
CATEGORY	A	B	C	D	
S-ILS 1	453-½	200 (200-½)		NA	
S-LOC 1	600-½	347 (400-½)	600-⅝ 347 (400-⅝)	NA	
CIRCLING	760-1	495 (500-1)	780-1½ 515 (600-1½)	NA	

ELEV 265	61	TDZE 253
REIL Rwy 19 MIRL Rwy 1-19		
FAF to MAP 4.9 NM		
Knots	60	90 120 150 180
Min:Sec	4:54	3:16 2:27 1:58 1:38