

WAAS CH 40107 W17A	APP CRS 169°	Rwy Idg 4200 TDZE 1047 Apt Elev 1047
--	------------------------	---

RNAV (GPS) RWY 17
DECATUR MUNI (LUD)

RNP APCH - GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
A Baro-VNAV and VDP NA when using FTW altimeter setting. When local altimeter setting not received, use FTW altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1466 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 120 feet.

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct NERME and hold, continue climb-in-hold

AWOS-3
118.225

LONE STAR APP CON
118.1 306.95

UNICOM
122.8(CTAF) 

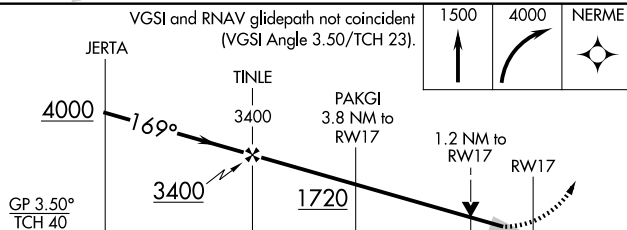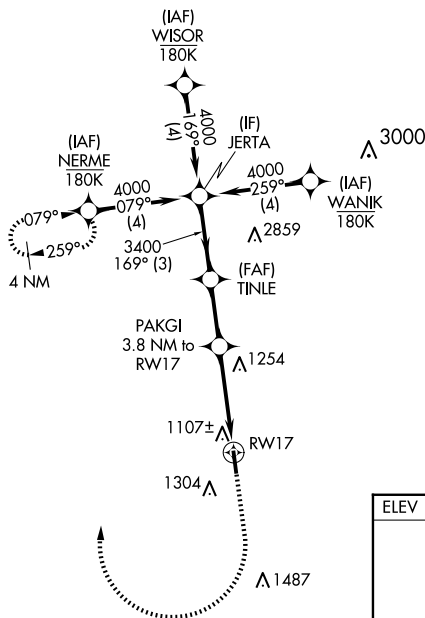

	3 NM	2.4 NM	2.6 NM	1.2 NM
CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)		NA
RNAV DA	1355-1	308 (400-1)		NA
RNAV MDA	1500-1	453 (500-1)		NA
CIRCLING	1600-1	553 (600-1)		NA

