

WAAS CH 77833 W35A	APP CRS 357°	Rwy Idg 4020 TDZE 1168 Apt Elev 1176
--	------------------------	---

RNAV (GPS) RWY 35

HAMPTON MUNI (HPT)


▽

⚠ NA

VDP and Baro-VNAV NA when using Mason City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet and all MDA 80 feet, and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH:
Climb to 4000 direct
WIBUD and hold,
continue climb-in-hold
to 4000.

AWOS-3 121.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.7 (CTAF)
--------------------------	--	-------------------------------

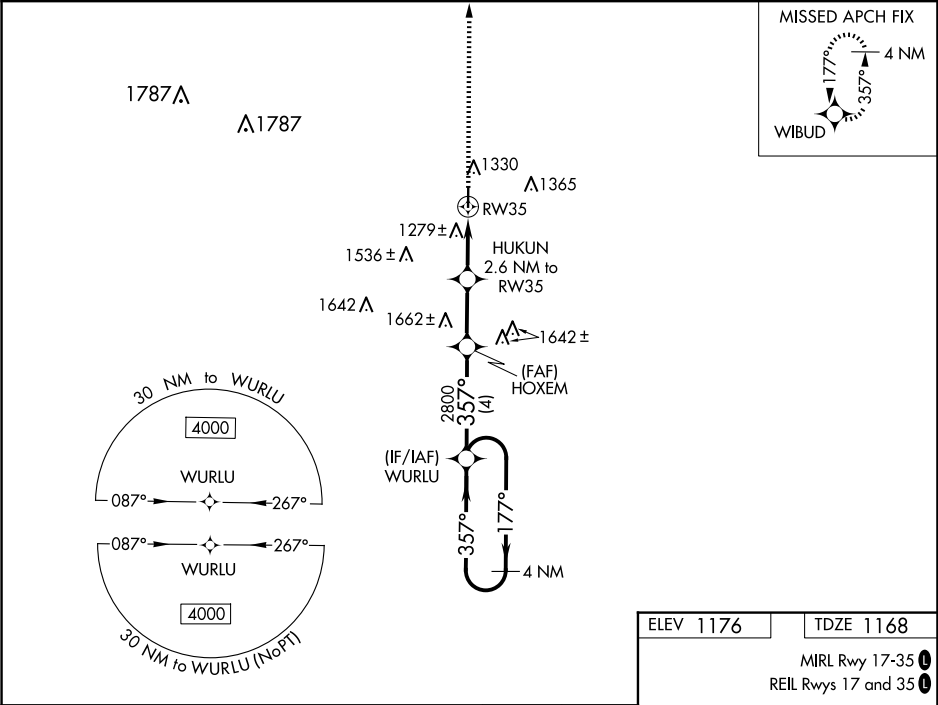

4 NM Holding Pattern

WURLU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

4000

WIBUD

GP 3.00° TCH 40

2800

2020

1.3 NM to RW35

2.6 NM to RW35

4 NM

2.4 NM

1.3 NM

1.3 NM

4000

WIBUD

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1418-1	250 (300-1)		NA
LNAV/VNAV DA	1654-1½	486 (500-1½)		NA
LNAV MDA	1620-1	452 (500-1)		NA
CIRCLING	1640-1	464 (500-1)		NA

