

WAAS  
CH **49131**  
**W17A**

APP CRS  
**166°**

Rwy Idg **4010**  
TDZE **1522**  
Apt Elev **1523**

**RNAV (GPS) RWY 17**  
LANGLADE COUNTY (AIG)

RNP APCH - GPS.



▼

▲

Baro-VNAV NA when using AUW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use AUW altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2029 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:  
Climb to 3300 direct ZABVI and hold.

|                          |                                          |                                 |
|--------------------------|------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.075</b> | MINNEAPOLIS CENTER<br><b>124.4 317.7</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|--------------------------|------------------------------------------|---------------------------------|

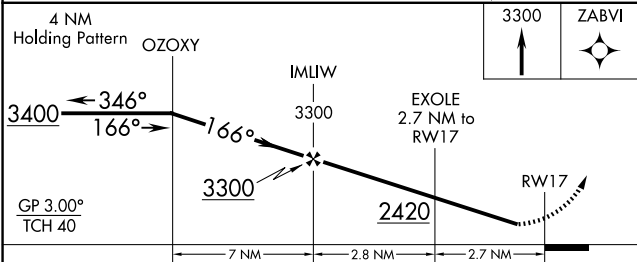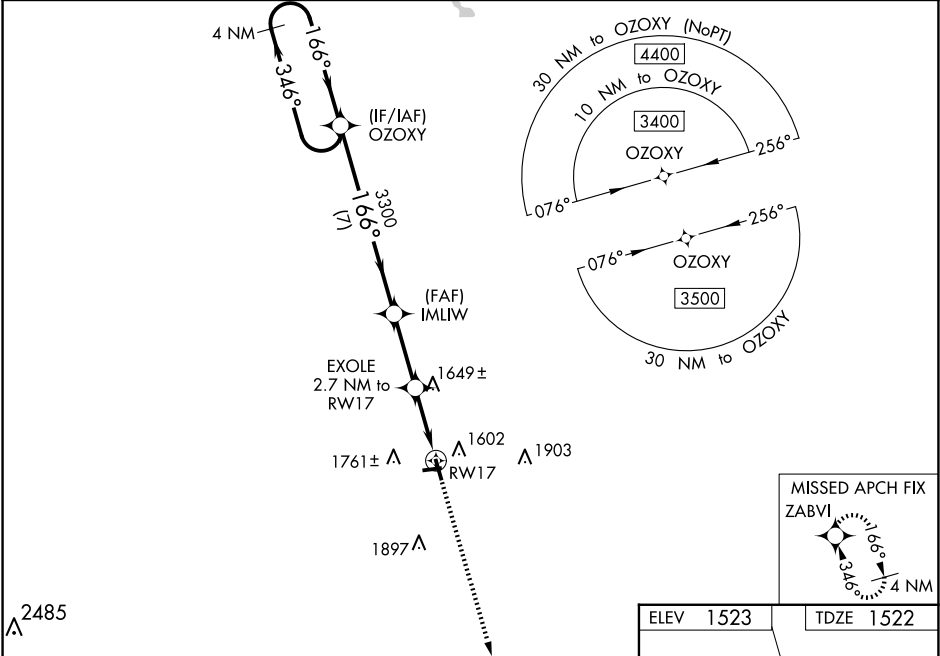

| CATEGORY     | A       | B           | C                     | D                       |
|--------------|---------|-------------|-----------------------|-------------------------|
| LPV DA       | 1772-1  |             | 250 (300-1)           |                         |
| LNAV/VNAV DA | 1924-1⅓ |             | 402 (400-1⅓)          |                         |
| LNAV MDA     | 1920-1  | 398 (400-1) | 1920-1⅓               | 398 (400-1⅓)            |
| CIRCLING     | 2120-1  | 597 (600-1) | 2260-2<br>737 (800-2) | 2260-2¼<br>737 (800-2¼) |

