

WAAS
CH **45732**
W35A

APP CRS
346°

Rwy Idg
TDZE **1522**
Apt Elev **1523**

RNAV (GPS) RWY 35

LANGLADE COUNTY (AIG)

RNP APCH - GPS.

▼



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C .

▲

Baro-VNAV and VDP NA when using AUW altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use AUW altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2124 feet and all visibilities ⅓ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 3400 direct
OZOOXY and hold.

AWOS-3 119.075	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

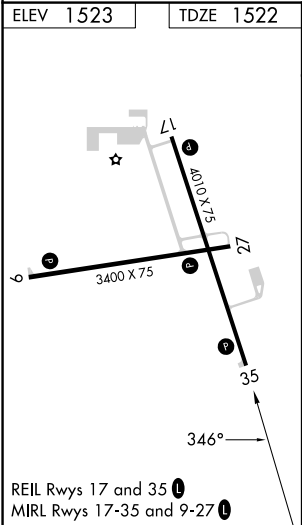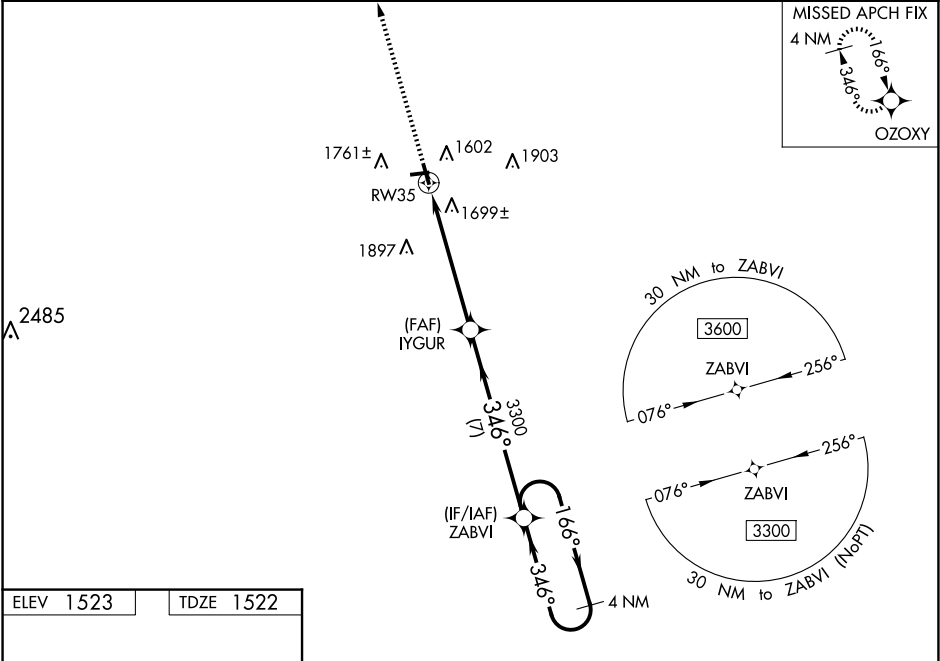

3400	OZOOXY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).			
		IYUR 3300	ZABVI	4 NM Holding Pattern	
		1.3 NM to RW35	3300	346°	166°
				346°	3300
				GP 3.00°	TCH 40
		1.3	4.2 NM	7 NM	
CATEGORY	A	B	C	D	
LPV DA	1772-1		250 (300-1)		
LNAV/VNAV DA	2019-1¾		497 (500-1¾)		
LNAV MDA	1960-1	438 (500-1)	1960-1¼	438 (500-1¼)	
CIRCLING	2120-1	597 (600-1)	2260-2 737 (800-2)	2260-2¼ 737 (800-2¼)	