

WAAS CH 40333 W13A	APP CRS 135°	Rwy Idg TDZE 820 Apt Elev 820
--	------------------------	---

RNAV (GPS) RWY 13

HALLOCK MUNI (HCO)

RNP APCH-GPS.


▼

⚠

Baro-VNAV NA when using Grafton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grafton altimeter setting and increase LPV DA to 1082 feet; increase LNAV/VNAV DA to 1161 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2800 direct HOGEB and hold.

AWOS-3 126.475	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	--

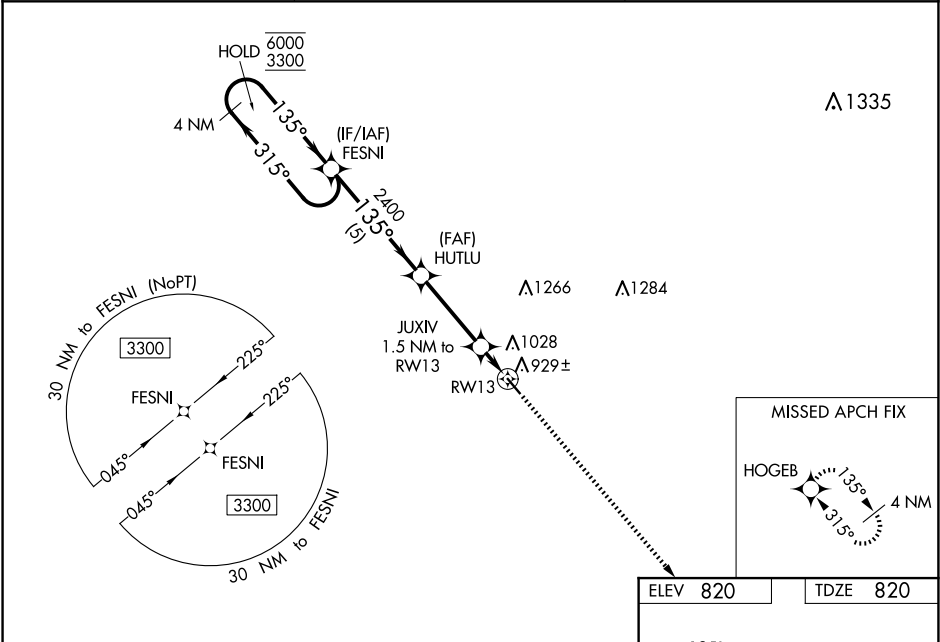

4 NM Holding Pattern		FESNI	HUTLU	JUXIV 1.5 NM to RW13	RW13
6000 ← 315° 3300 → 135°		2400	2400	1340	
GP 3.00° TCH 45		5 NM	3.3 NM	1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	1020-1 200 (200-1)			NA	
LNAV/VNAV DA	1099-1 279 (300-1)			NA	
LNAV MDA	1180-1 360 (400-1)			NA	
C CIRCLING	1380-1 560 (600-1)		1380-1½ 560 (600-1½)		NA

