

WAAS CH 90416 W36A	APP CRS 004°	Rwy Idg 4000 TDZE 752 Apt Elev 754
--	------------------------	---

RNAV (GPS) RWY 36

WASHINGTON MUNI (AWG)


RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1064 feet and LNAV/VNAV DA to 1072 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GANAD and hold.

AWOS-3 127.825	CHICAGO CENTER 135.6 370.95	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

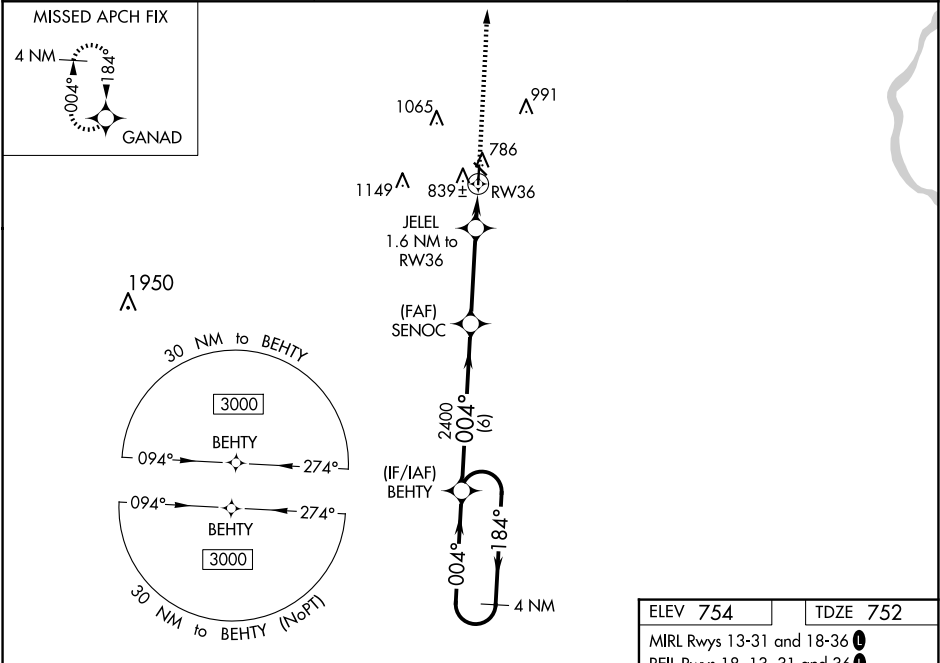

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

3000

GANAD

4 NM Holding Pattern

BEHTY

SENOC

JELE 1.6 NM to RW36

RW36

GP 3.00°

TCH 45

6 NM

3.4 NM

0.6

1 NM

CATEGORY	A	B	C	D
LPV DA	1002-1	250 (300-1)		NA
LNAV/VNAV DA	1010-1	258 (300-1)		NA
LNAV MDA	1100-1	348 (400-1)		NA
CIRCLING	1200-1 446 (500-1)	1260-1 506 (600-1)	1500-2¼ 746 (800-2¼)	NA

ELEV 754

TDZE 752

MIRL Rwy 13-31 and 18-36 0

REIL Rwy 18, 13, 31 and 36 0