

WAAS CH 69326 W24A	APP CRS 238°	Rwy Idg TDZE Apt Elev	5004 713 733
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24


DAVIDSON COUNTY EXEC (E.XX)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cals visibility 1/8 SM, LNAV Cat C visibility 1/4 SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 3000 direct WOKIR and hold.

AWOS-3 119.825	GREENSBORO APP CON 126.6 327.075	GCO 135.075	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

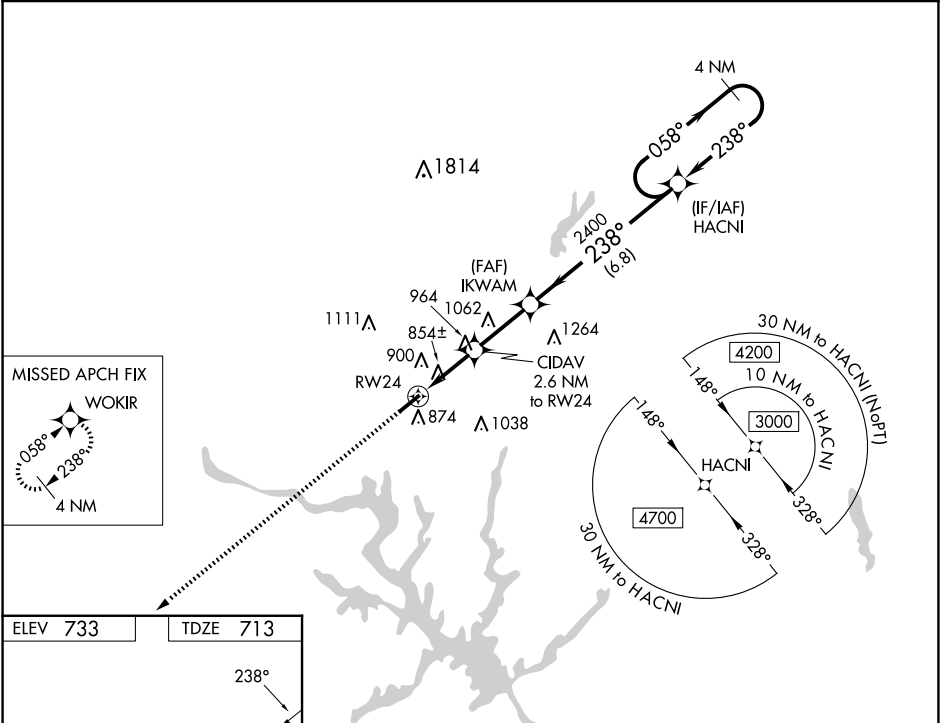

ELEV 733 TDZE 713

3000 WOKIR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).

4 NM Holding Pattern

*LNAV only

*1.5 NM to RW24

CIDAV 2.6 NM to RW24

IKWAM 2400

HACNI

3000

GP 3.00° TCH 51

1.5 NM 1.1 NM 2.6 NM 6.8 NM

CATEGORY A B C D

LPV DA 1026-1 313 (300-1) NA

LNAV/VNAV DA 1150-1½ 437 (500-1½) NA

LNAV MDA 1220-1 507 (500-1) 1220-1¾ 507 (500-1¾) NA

CIRCLING 1220-1 487 (500-1) 1240-1 507 (600-1) 1340-1¾ 607 (700-1¾) NA

MIRL Rwy 6-24 0

REIL Rwy 24 0