

WAAS CH 90216 W27A	APP CRS 274°	Rwy Idg 5390 TDZE 552 Apt Elev 569
--	------------------------	---


RNAV (GPS) RWY 27
MERKEL FLD SYLACAUGA MUNI (SCD)

▼ For uncompensated baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Birmingham altimeter setting.


▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Birmingham altimeter setting and increase LPV DA to 889 feet, LNAV/VNAV DA to 1161 feet, and all visibilities $\frac{3}{8}$ mile. Increase all MDA 100 feet and LNAV Cat C and D visibilities $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 3200 direct
GOKYE and hold.

AWOS-3PT 119.125	BIRMINGHAM APP CON 123.8 256.8	UNICOM 122.8 (CTAF) 0
----------------------------	--	--

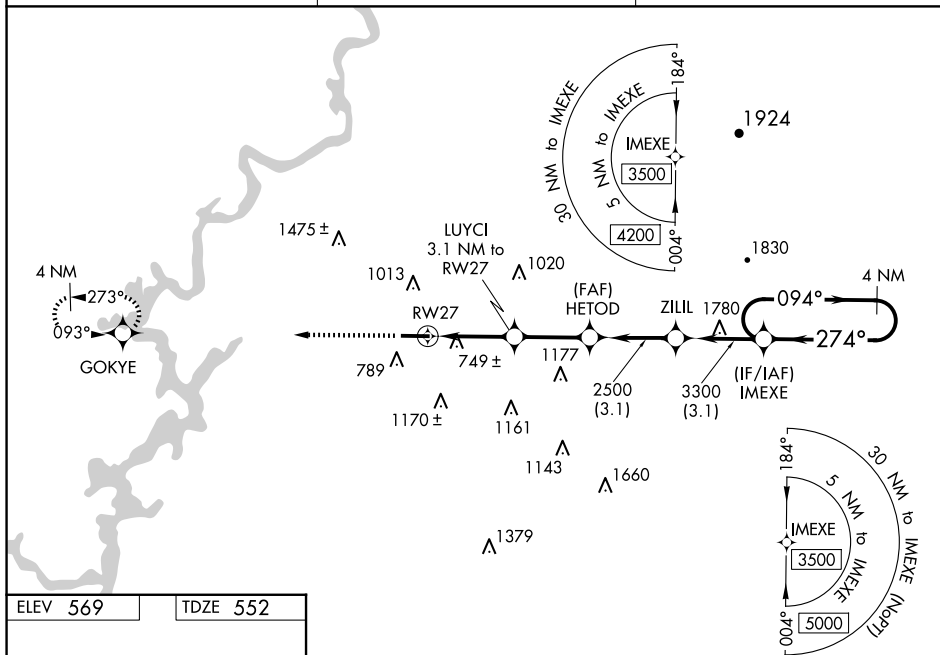

ELEV 569		TDZE 552
----------	--	----------



3200 GOKYE VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40). 4 NM Holding Pattern

*LNNAV only. LUYCI 3.1 NM to RW27

2500

274° 3300 094° 3500

274°

GP 3.10° TCH 48

1.3 NM 1.8 NM 2.7 NM 3.1 NM 3.1 NM

CATEGORY	A	B	C	D
LPV DA	802-3 $\frac{3}{4}$		250 (300-3 $\frac{3}{4}$)	
LNNAV/VNAV DA	1074-1 $\frac{3}{4}$		522 (600-1 $\frac{3}{4}$)	
LNNAV MDA	1000-1 448 (500-1)		1000-1 $\frac{3}{8}$ 448 (500-1 $\frac{3}{8}$)	
CIRCLING	1140-1 571 (600-1)	1400-1 $\frac{1}{4}$ 831 (900-1 $\frac{1}{4}$)	1620-3 1051 (1100-3)	1700-3 1131 (1200-3)