

VORTAC HLI	APP CRS	Rwy Idg	N/A
112.4	094°	TDZE	N/A
Chan 71		Apt Elev	467

VOR/DME-A
RIPLEY (25M)

▼ ▲ NA	Use Corinth altimeter setting; when not received, use Tupelo altimeter setting and increase all MDAs 40 feet, and visibility Cat C ¼ SM. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climbing left turn to 3000 via heading 251° and HLI VORTAC R-094 to HLI VORTAC and hold.
-----------	---	---

CRX AWOS-3PT 118.675	MEMPHIS CENTER 135.9 260.6	UNICOM 122.8 (CTAF) 0
-------------------------	-------------------------------	--------------------------

Procedure NA for arrivals on HLI VORTAC
airway radials 045 CW 112.


IAF
HOLLY SPRINGS
112.4 HLI
Chan 71

(IF) TIERD
HLI 10


Λ 935

Λ 902

Λ 1050



ELEV 467

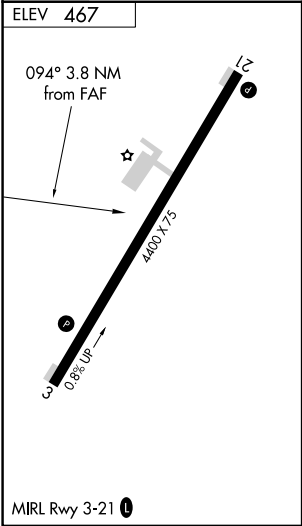

MRL Rwy 3-21 0

1126
Λ

