


WAAS CH 56527 W06A	APP CRS 059°	Rwy Idg 4999 TDZE 420 Apt Elev 428
--	------------------------	---

RNAV (GPS) RWY 6


MUHENBERG COUNTY (M21)

RNP APCH - GPS.	▼ ▲ NA When local altimeter setting not received, use Owensboro altimeter setting and increase all MDAs 80 feet and LP visibility Cat C/D $\frac{1}{4}$, LNAV visibility Cat B/C/D $\frac{1}{4}$, and Circling visibility Cat B/C/D $\frac{1}{4}$. Rwy 6, helicopter visibility reduction below $\frac{3}{4}$ SM NA. Circling Rwy 24 NA at night.	MISSED APPROACH: Climbing right turn to 3000 direct JEPAX and hold.
-----------------	--	--

AWOS-3 120.45	CAMPBELL APP CON ★ 118.1 269.525	UNICOM 123.0 (CTAF) 0
-------------------------	--	---------------------------------

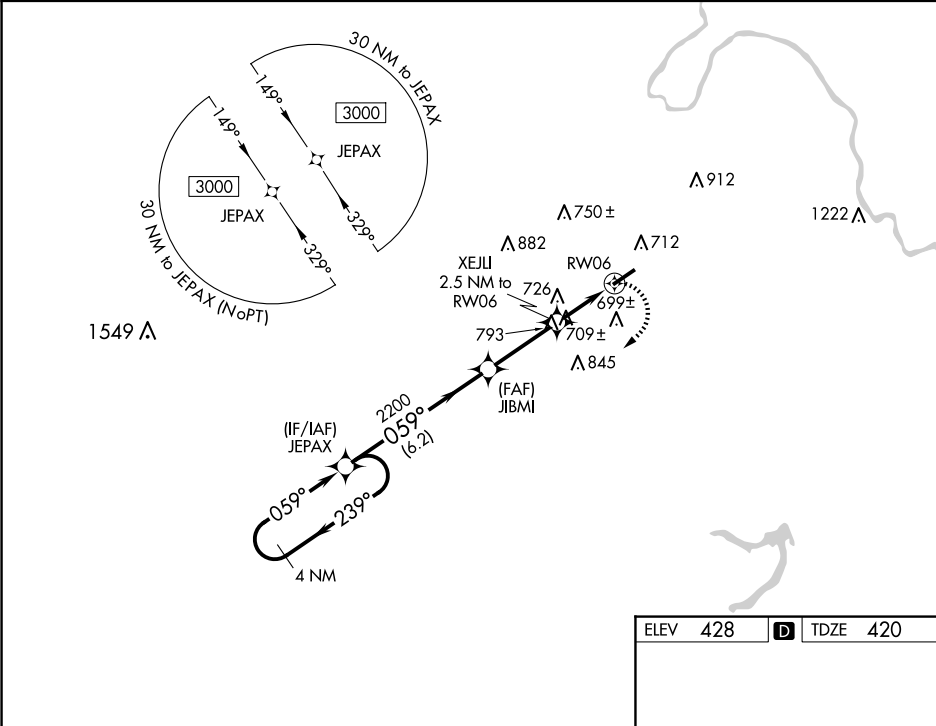

4 NM Holding Pattern		JEPAX		VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 40).		3000	JEPAX
3000		239°		059°		059°	
		JIBMI		3.00° TCH 40		XEJLI 2.5 NM to RW06	
2200		1240				RW06	
		6.2 NM		3 NM		2.5 NM	
CATEGORY	A	B	C	D			
LP MDA	960-1	540 (600-1)	960-1½	540 (600-1½)			
LNAV MDA	1100-1	680 (700-1)	1100-1⅞	680 (700-1⅞)			
CIRCLING	1100-1	672 (700-1)	1180-2¼ 752 (800-2¼)	1200-2½ 772 (800-2½)			

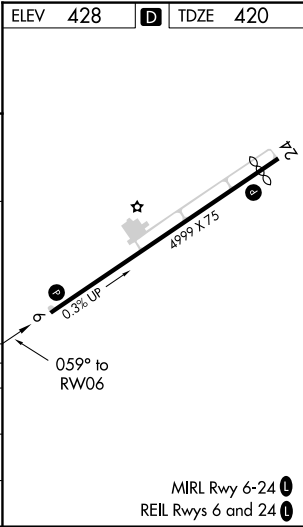

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025